

5678 Easy Street | Example, TN

Property Workup

THIS REPORT IS USED TO DETERMINE THE FEASIBILITY OF THE REDRY SYSTEM.

THIS REPORT IS CONFIDENTIAL AND PREPARED SOLELY FOR ROOF MRI DEMO.

ROOF MRI | ReDry by

TABLE OF CONTENTS

PROPERTY WORKUP

5678 Easy Street, Example, TN

September 23, 2026

What's In This Report 3

Overview | Roof CAD 4

- Property Overview 5
- Property Details 6

Sunlight 7

- Section 1 | Sunlight 8
- Section 2 | Sunlight 9
- Section 3 | Sunlight 10
- Section 4 | Sunlight 11
- Section 5 | Sunlight 12
- Section 6 | Sunlight 13

Ponding | Ponding Overview 14

- Ponding 15
- Action Map 18

MRI Results | Moisture Summary 19

- Moisture Scan Overview 20
- Moisture Map 21

Section 1 | Measurements 22

- MRI Report 23
- Slope 24

Section 2 | Measurements 25

- MRI Report 26
- Slope 27

Section 3 | Measurements 28

+ 19 more sections

Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI | ReDryby

WHAT'S IN THIS REPORT

PROPERTY WORKUP

5678 Easy Street, Example, TN

September 23, 2026

Everything in here was measured on this roof. Here is what each report does for you.

1 Prelim

Know the whole roof before anybody sets a ladder. Size, sections, slope, photos, core sample. One document. When three people are talking about the roof, they are all looking at the same page.

2 MRI Report

Know how wet the roof is, where it is, and where it ends. Dry, damp, wet in every square. Walk into the conversation with numbers while everybody else is guessing from a thermal picture.

3 Measurements

Easily calculate everything you need for the job. Square footage. Wall length. Inside and outside corner counts and wall height.

4 Ponding Report

See where the water stands without waiting on a storm. Depth, location, and where the flow dead-ends. The water story of the roof, calculated instead of guesstimated.

5 Slope Report

See every nuance of how the roof is sloped. We calculate this multiple times for every square foot so you have the best data to make the best decisions. Coming soon, taper designs that factor in the current slopes of the roof.

6 Vent Placement Map

Based off the MRI Report, this map allows you to understand placement before and after the job starts. Each one is hand made to maximize ReDry's drying power.

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry

ROOF CAD

OVERVIEW

5678 Easy Street, Example, TN

September 23, 2026

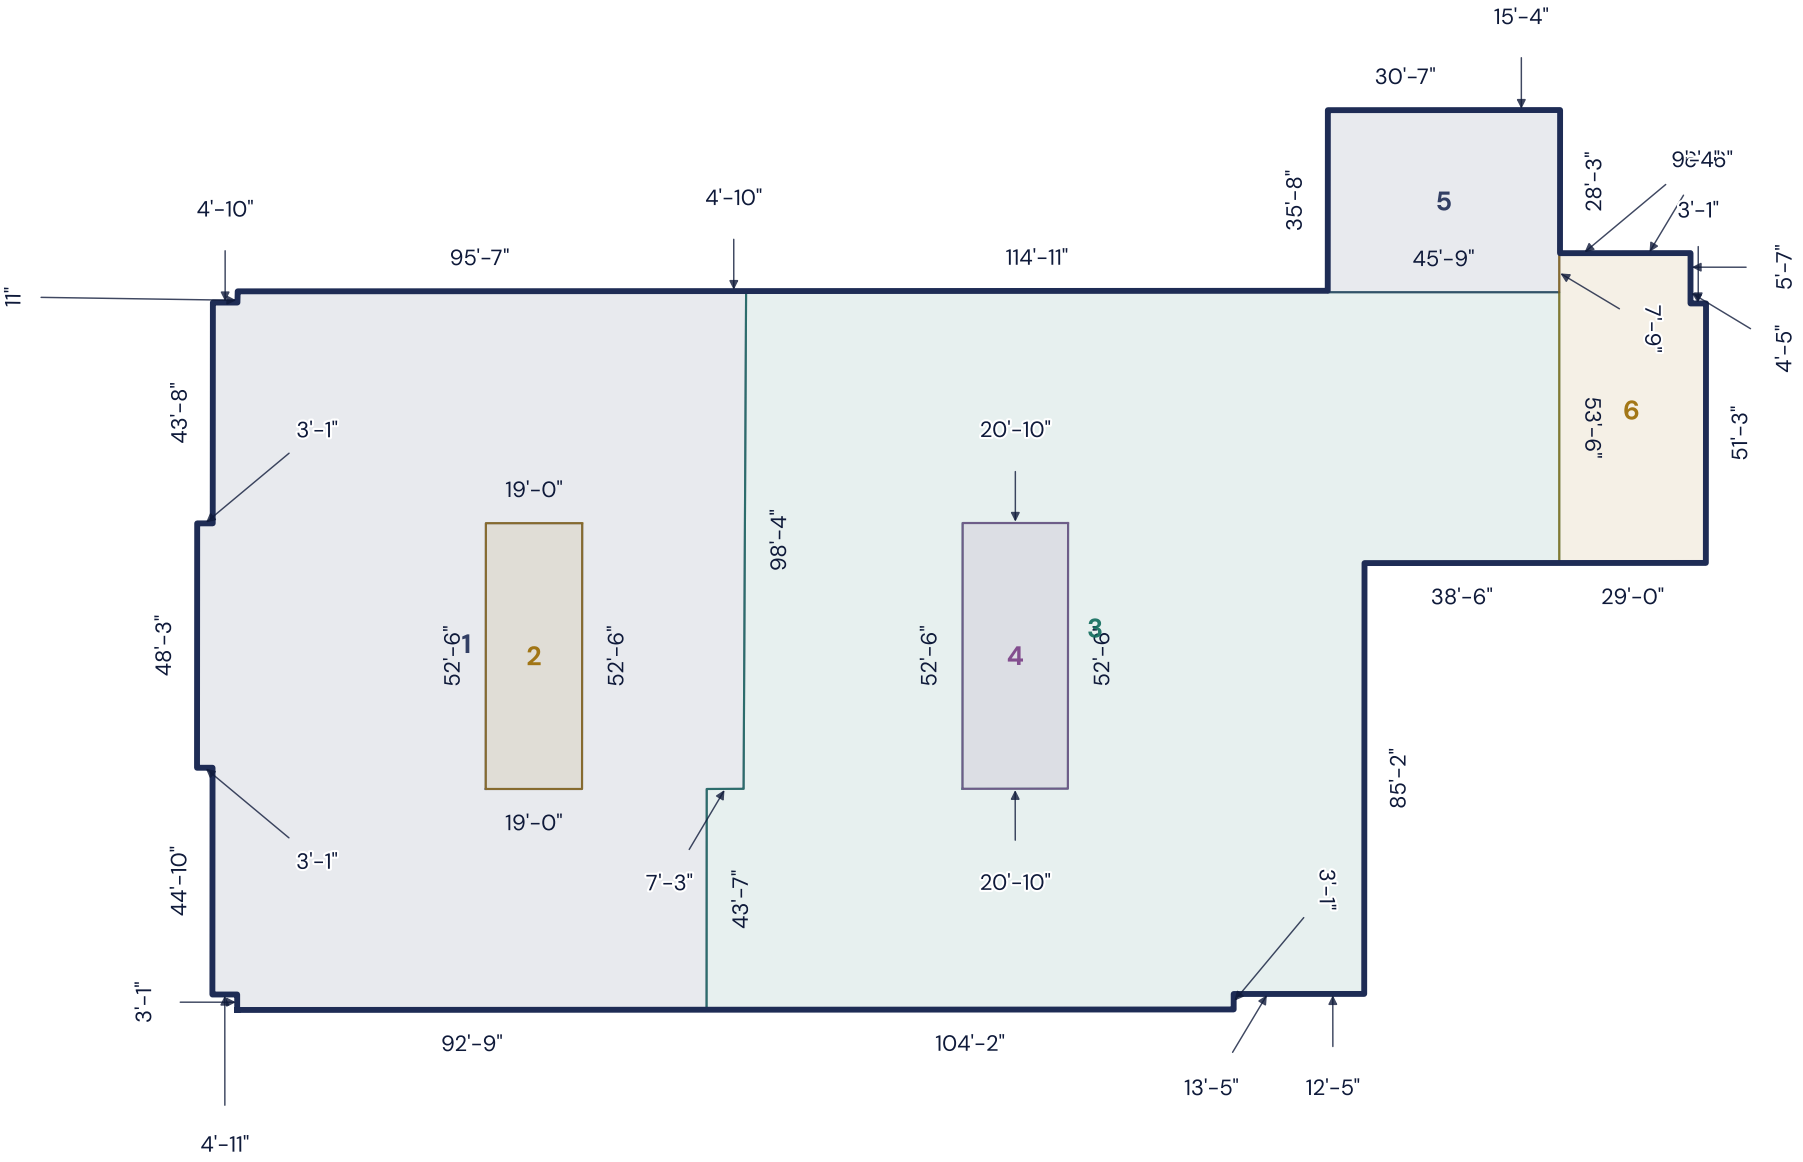

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | ReDryby

PROPERTY OVERVIEW

PROPERTY WORKUP

5678 Easy Street, Example, TN

September 23, 2026

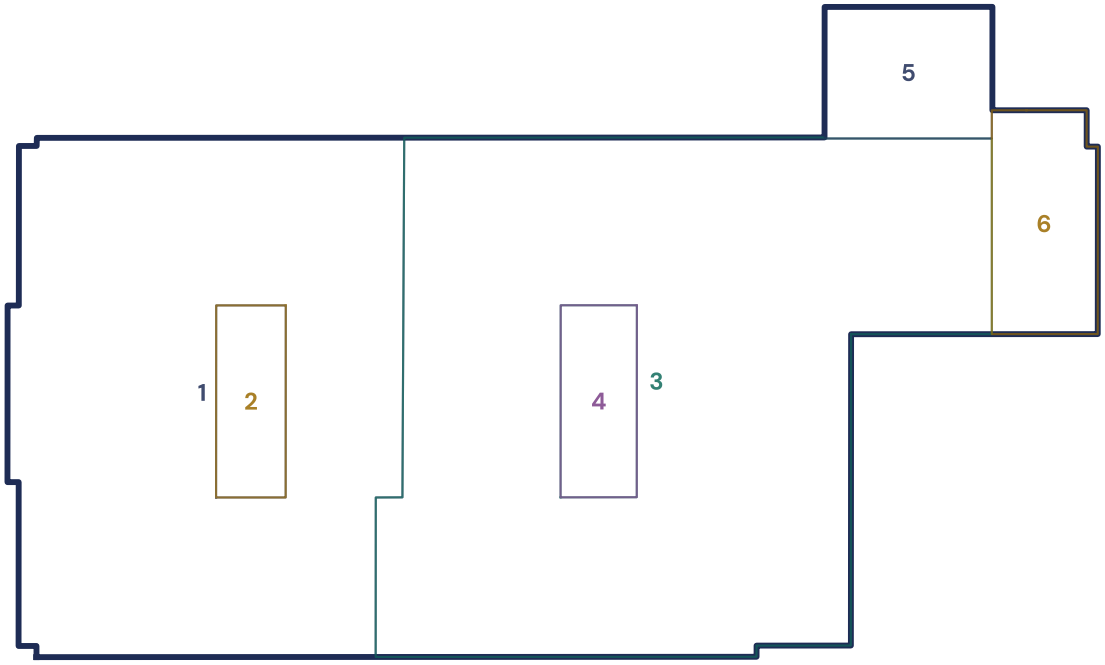

MEASUREMENTS

Roof area	**37,809 sqft**
Squares	**378.1**
Perimeter	**951 LF**
Sections	**6**
Section walls	**546 LF**
Grid squares to scan	**~426 | 10 x 10 ft**
Total ponding areas	**2**
Damp	**17.4% of roof**
Wet	**16.2% of roof**

SECTIONS

- Section 1 | 108.5 x 142.1 ft | 13,725 sqft | 11 x 15
  Damp 18.6% | Wet 9.6%
- Section 2 | 19.1 x 52.5 ft | 1,000 sqft | 2 x 6
  Damp 0% | Wet 0%
- Section 3 | 168.5 x 142.1 ft | 18,595 sqft | 17 x 15
  Damp 21.6% | Wet 26.1%
- Section 4 | 20.9 x 52.5 ft | 1,094 sqft | 3 x 6
  Damp 0% | Wet 0%
- Section 5 | 45.9 x 36 ft | 1,649 sqft | 5 x 4
  Damp 0% | Wet 0%
- Section 6 | 29 x 61.2 ft | 1,743 sqft | 3 x 7
  Damp 9.5% | Wet 9.5%



Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI | ReDryby

PROPERTY DETAILS

PROPERTY WORKUP

5678 Easy Street, Example, TN

September 23, 2026

ROOF

Estimated scan time	**~1 hr 35 min**
IECC climate zone	**4A**
IBC edition	**2021**

MONTH	ROOFTOP TEMP F	WIND MPH
Jan	**56**	**6.4**
Feb	**65**	**7.1**
Mar	**78**	**7.2**
Apr	**90**	**6.5**
May	**99**	**5.3**
Jun	**106**	**4.9**
Jul	**109**	**4.3**
Aug	**107**	**4.1**
Sep	**98**	**4.2**
Oct	**83**	**4.6**
Nov	**67**	**5.3**
Dec	**57**	**6.0**

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry

SUNLIGHT

SUNLIGHT

5678 Easy Street, Example, TN

September 23, 2026

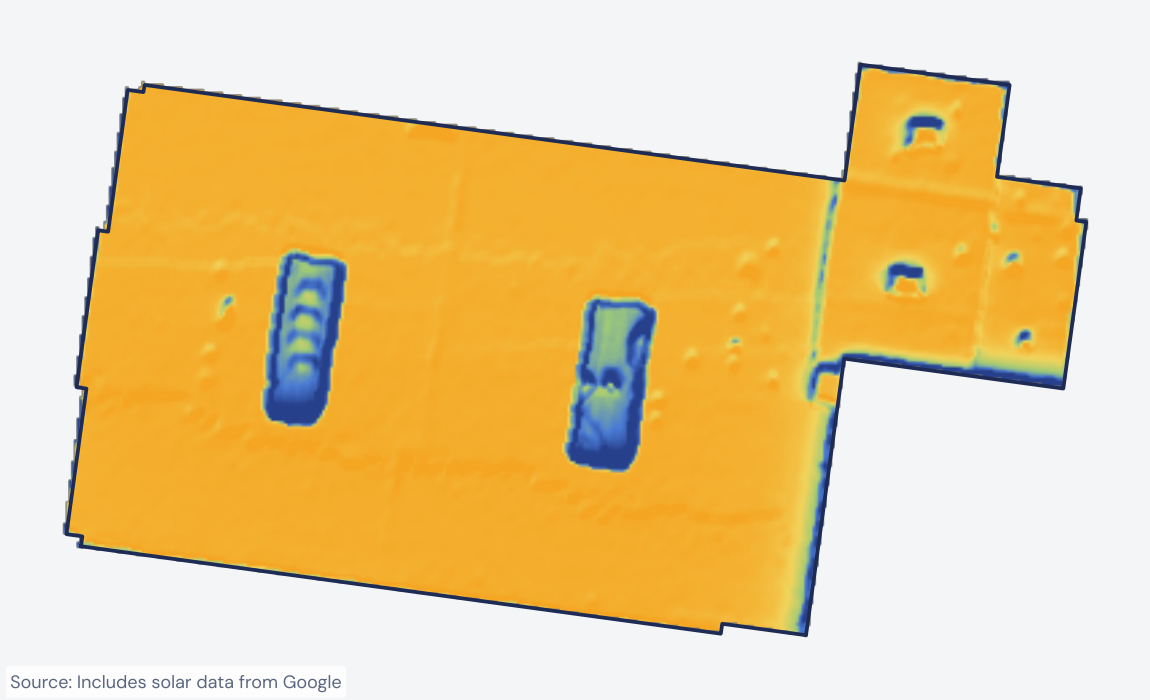

Source: Includes solar data from Google

Sunlight: kWh per kW per year


800 900 1000 1100 1200 1300 1400 1500

SUNSHINE


Sunniest spot	**1,521 hours per year**
Roof mean	**1,431 kWh per kW**
Brightest tenth	**1,501 kWh per kW**
Shadiest tenth	**1,287 kWh per kW**
Sunlit share of daylight	**85%**

BY MONTH


kWh per kW

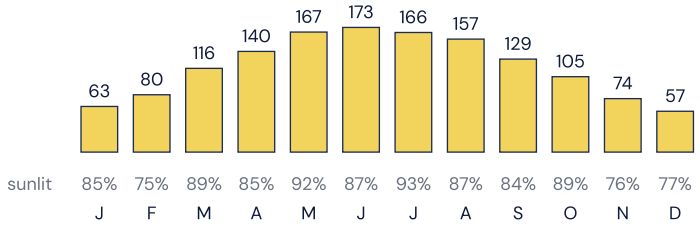

SHADE



June 87% sunlit



December 77% sunlit


ROOF MRI

SECTION 1

SUNLIGHT

5678 Easy Street, Example, TN

September 16, 2026

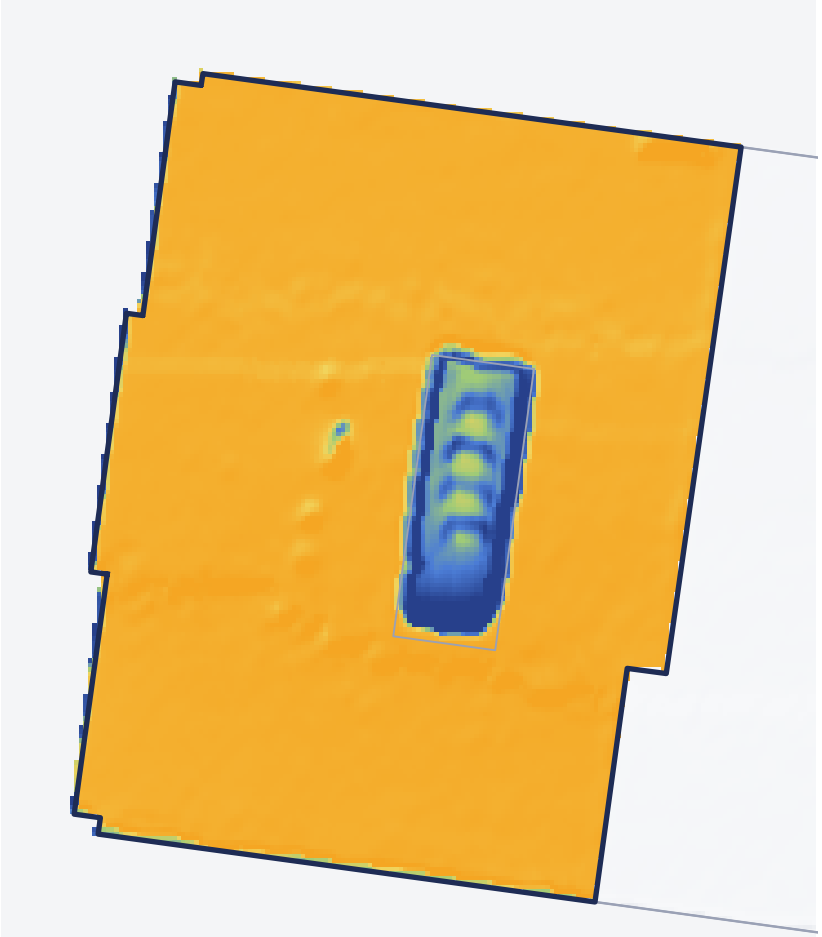

Source: Includes solar data from Google

Sunlight: kWh per kW per year


800 900 1000 1100 1200 1300 1400 1500

SUNSHINE


Section mean	1,441 kWh per kW
Brightest tenth	1,501 kWh per kW
Shadiest tenth	1,426 kWh per kW
Roof mean	1,431 kWh per kW
Sunlit share of daylight	86%
Roof, sunlit share	85%
Area	14,833 sqft

BY MONTH

kWh per kW

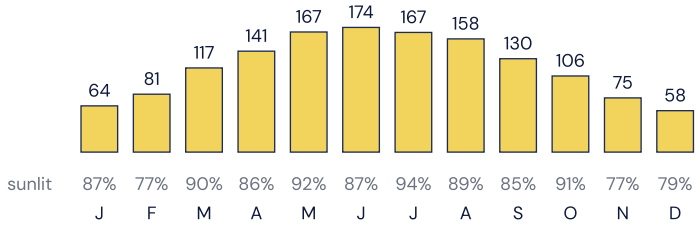

SHADE

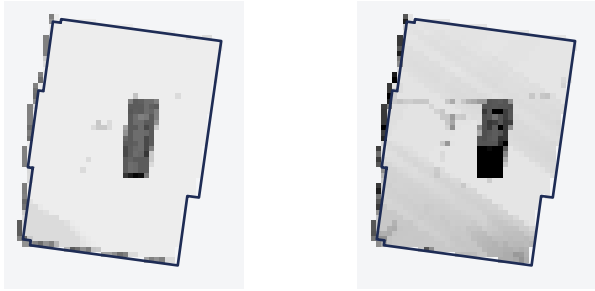

June 87% sunlit Dec


ROOF MRI

SECTION 2

SUNLIGHT

5678 Easy Street, Example, TN

September 16, 2026

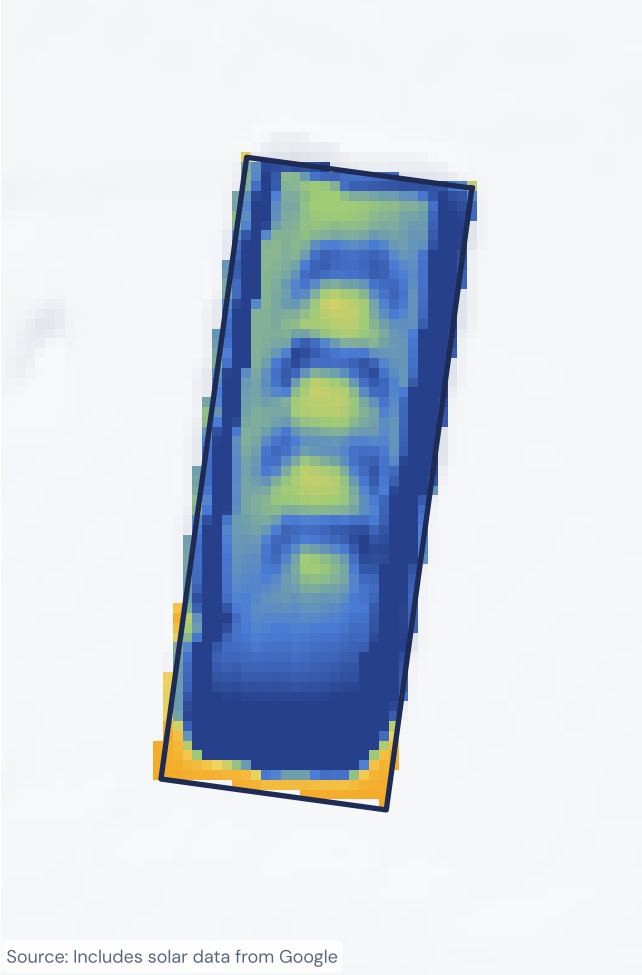

Source: Includes solar data from Google

Sunlight: kWh per kW per year


800 900 1000 1100 1200 1300 1400 1500

SUNSHINE

Section mean	931 kWh per kW
Brightest tenth	1,158 kWh per kW
Shadiest tenth	628 kWh per kW
Roof mean	1,431 kWh per kW
Sunlit share of daylight	48%
Roof, sunlit share	85%
Area	1,038 sqft

BY MONTH

kWh per kW

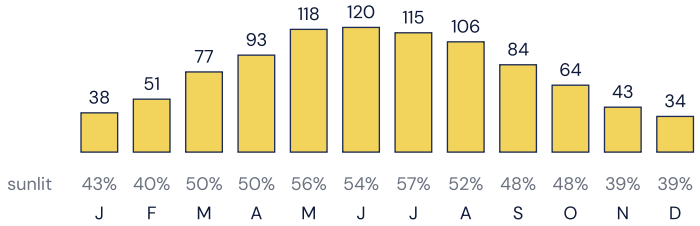

SHADE



June 54% sunlit Dec


ROOF MRI

SECTION 3

SUNLIGHT

5678 Easy Street, Example, TN

September 16, 2026

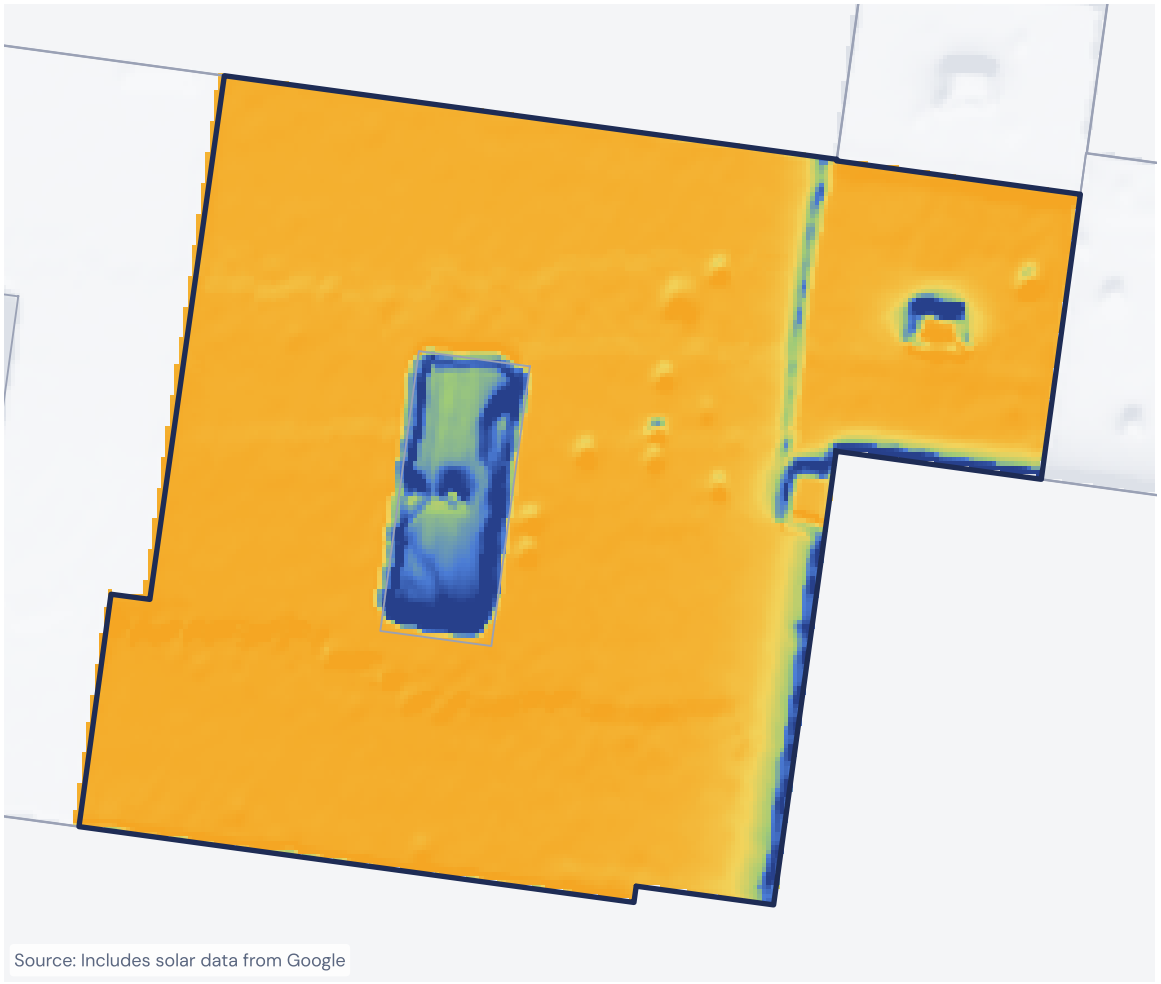

Source: Includes solar data from Google

Sunlight: kWh per kW per year


800 900 1000 1100 1200 1300 1400 1500

SUNSHINE


Section mean	1,431 kWh per kW
Brightest tenth	1,501 kWh per kW
Shadiest tenth	1,282 kWh per kW
Roof mean	1,431 kWh per kW
Sunlit share of daylight	85%
Roof, sunlit share	85%
Area	19,804 sqft

BY MONTH


kWh per kW

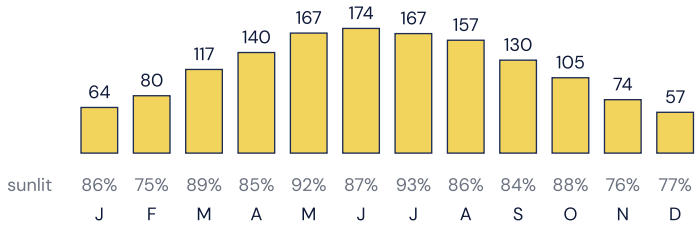

SHADE



June 87% sunlit



Dec


ROOF MRI

SECTION 4

SUNLIGHT

5678 Easy Street, Example, TN

September 16, 2026

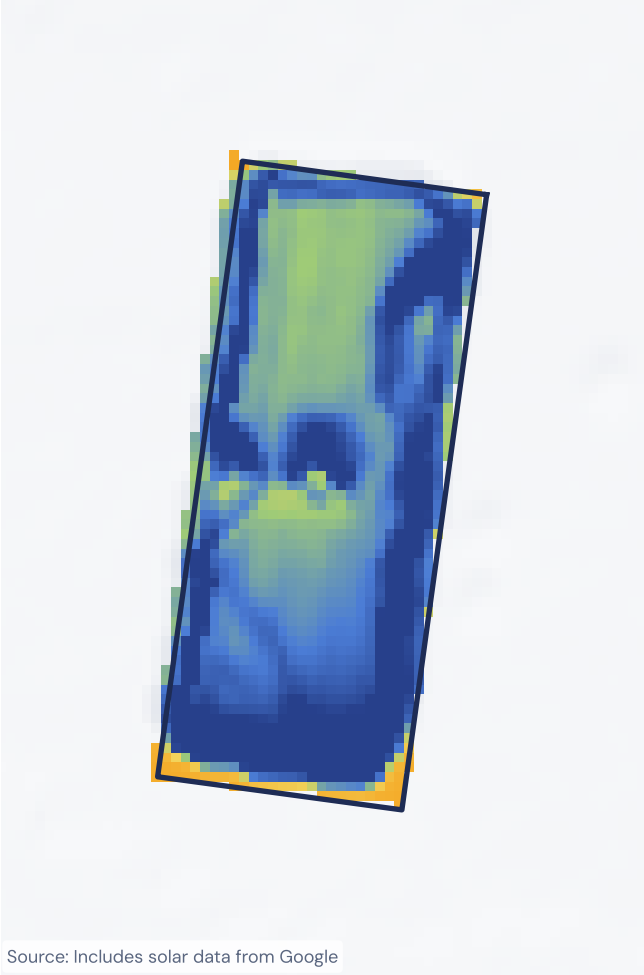

Source: Includes solar data from Google

Sunlight: kWh per kW per year


800 900 1000 1100 1200 1300 1400 1500

SUNSHINE

Section mean	932 kWh per kW
Brightest tenth	1,134 kWh per kW
Shadiest tenth	652 kWh per kW
Roof mean	1,431 kWh per kW
Sunlit share of daylight	45%
Roof, sunlit share	85%
Area	1,130 sqft

BY MONTH

kWh per kW

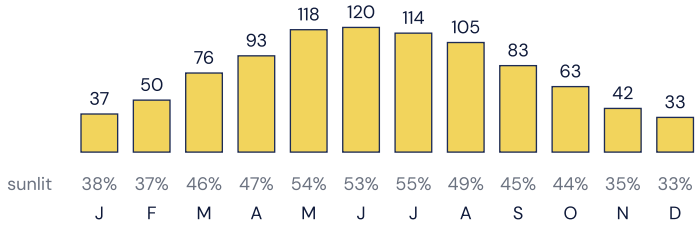

SHADE



June 53% sunlit **Dec**

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 5

SUNLIGHT

5678 Easy Street, Example, TN

September 16, 2026

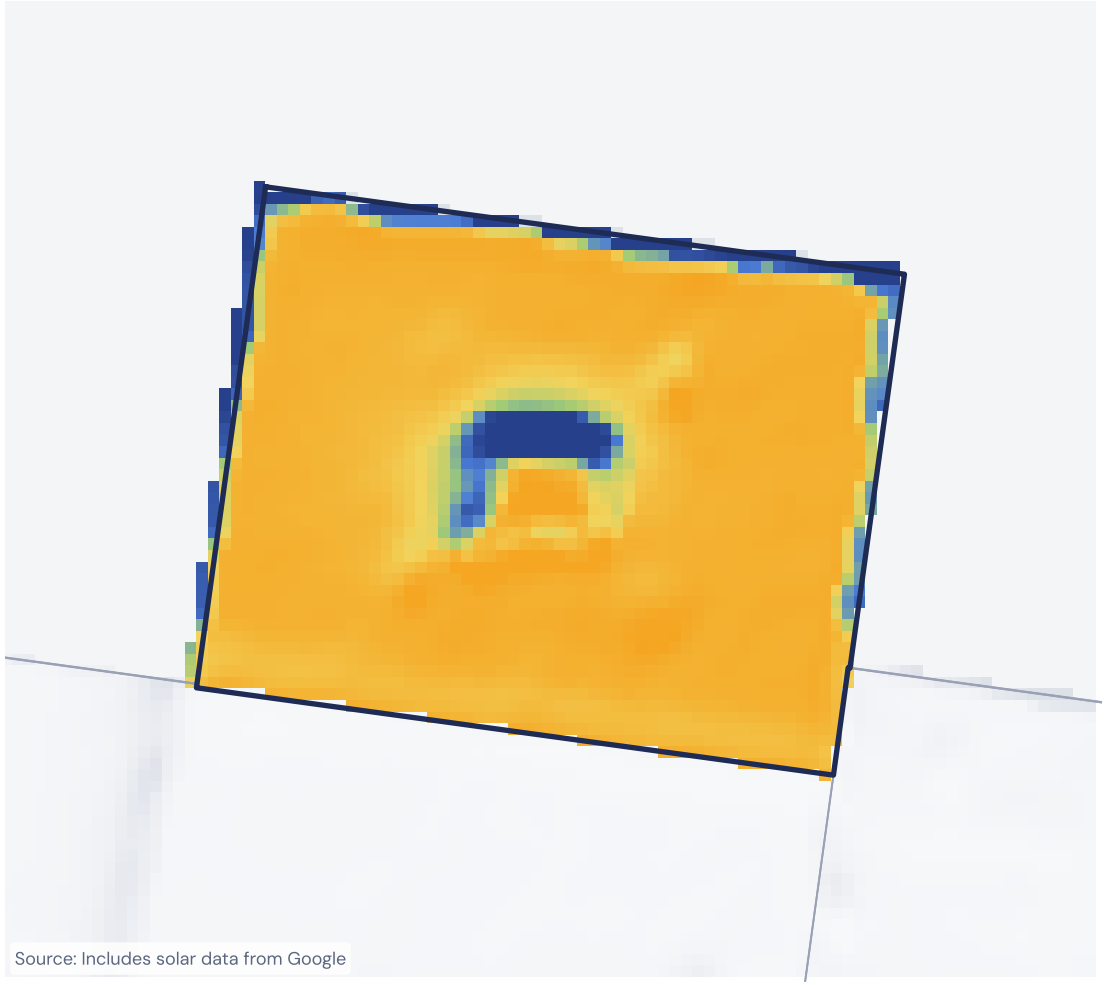

Sunlight: kWh per kW per year


800 900 1000 1100 1200 1300 1400 1500

SUNSHINE


Section mean	1,397 kWh per kW
Brightest tenth	1,496 kWh per kW
Shadiest tenth	1,187 kWh per kW
Roof mean	1,431 kWh per kW
Sunlit share of daylight	84%
Roof, sunlit share	85%
Area	1,678 sqft

BY MONTH


kWh per kW

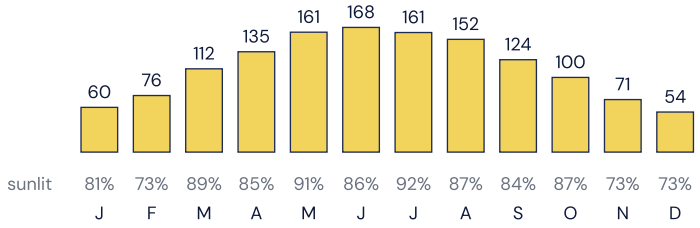

SHADE



June 86% sunlit



Dec


ROOF MRI

SECTION 6

SUNLIGHT

5678 Easy Street, Example, TN

September 16, 2026

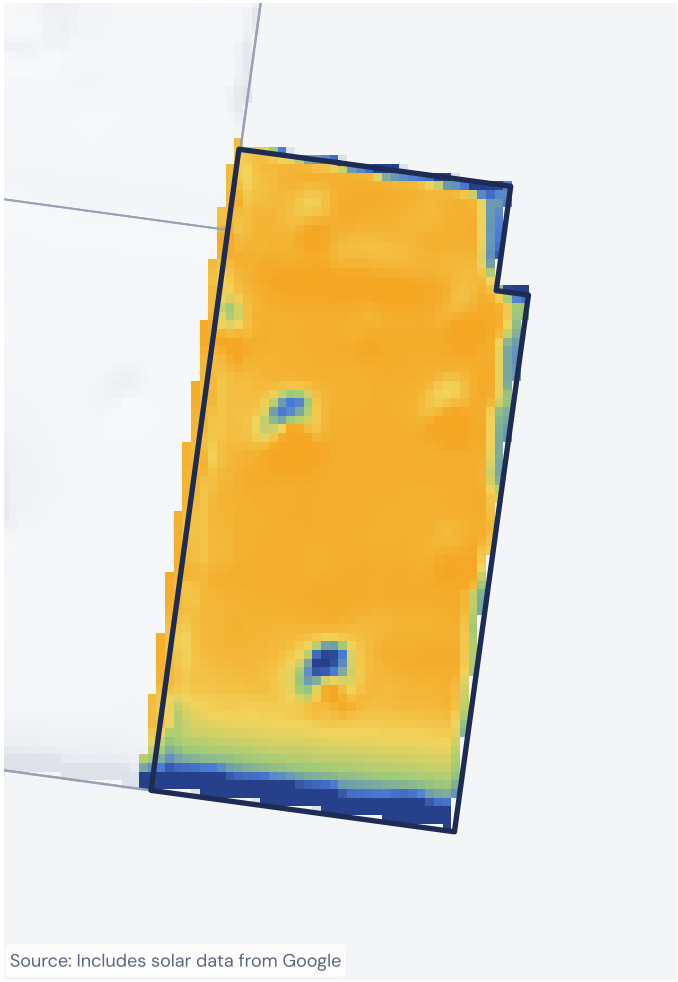

Source: Includes solar data from Google

Sunlight: kWh per kW per year


800 900 1000 1100 1200 1300 1400 1500

SUNSHINE


Section mean	1,386 kWh per kW
Brightest tenth	1,504 kWh per kW
Shadiest tenth	1,127 kWh per kW
Roof mean	1,431 kWh per kW
Sunlit share of daylight	79%
Roof, sunlit share	85%
Area	1,799 sqft

BY MONTH


kWh per kW

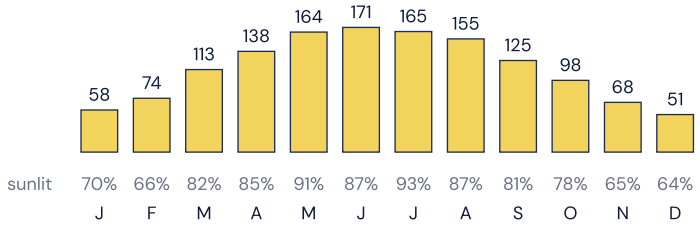

SHADE



June 87% sunlit



Dec

Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI | by ReDry

PONDING OVERVIEW

PONDING

5678 Easy Street, Example, TN

September 23, 2026



BUILDINGS

Building 1 — **37,809 sqft | 4 levels**

2 ponding areas | eave ≈15 ft



Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI

BUILDING 1

SLOPE + FLOW

5678 Easy Street, Example, TN

September 17, 2026



Source: Includes solar data from Google

MEASUREMENTS

Roof area	**37,809 sqft**
Perimeter	**951 lf**
Corners	**13 outside | 9 inside**
Eave height	**≈ 15 ft**

LEVELS

Level 1 | 16,636 sqft — **0.12 in/ft toward N**
flow ends at edge + interior | DEAD FLAT | slope under 1/8 in/ft

Level 2 | 14,106 sqft — **0.03 in/ft toward S**
flow ends at roof edge | DEAD FLAT | slope under 1/8 in/ft

Level 3 | 4,145 sqft — **0.03 in/ft toward NNW**
flow ends at roof edge | DEAD FLAT | slope under 1/8 in/ft

Level 4 | 810 sqft — **0.19 in/ft toward WSW**
surface span 43" | SLOPED ROOF | ponding n/a

TOP PONDING (OF 4)

P1 | 506 sqft — **3.0" max | ~452 gal**
in field

P2 | 44 sqft — **1.8" max | ~21 gal**
in field

P3 | 47 sqft — **1.0" max | ~19 gal**
in field

N

PROPER .25 and up | ADEQUATE .15 to .25 | POOR .05 to .15 | FLAT under .05

Trails follow the modeled waterflow; length and color carry the slope factor in inches per foot. Short blue trails barely move.

Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI


BUILDING 1

DRAINAGE GRADE

5678 Easy Street, Example, TN

September 17, 2026

PROPER	ADEQUATE	POOR	FLAT
12%	24%	59%	5%

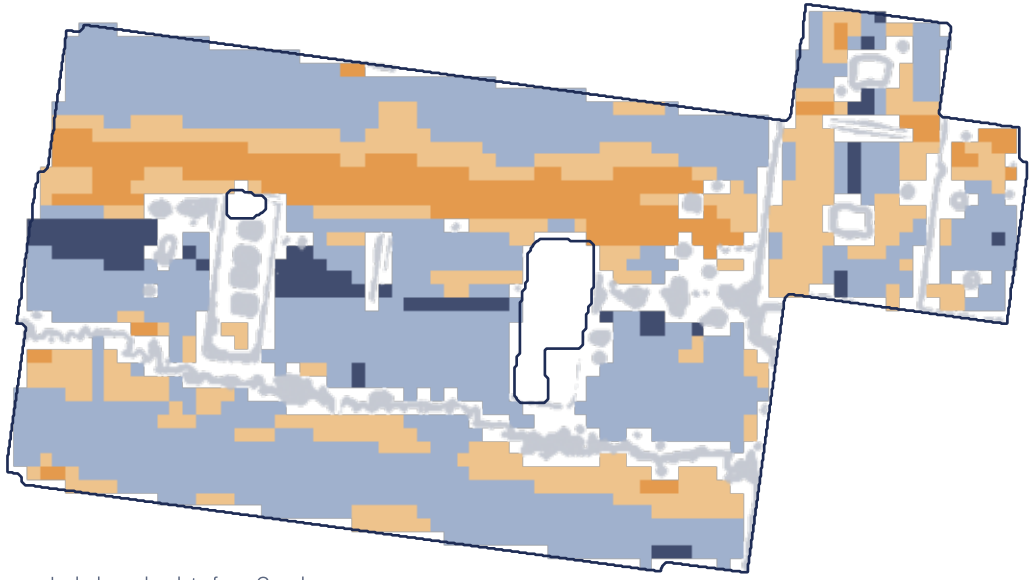

Source: Includes solar data from Google

N

PROPER .25 and up | ADEQUATE .15 to .25 | POOR .05 to .15 | FLAT under .05

Graded by measured slope in 4 x 4 ft cells; Proper meets the 1/4 in/ft design minimum.
Percentages measured over the whole surface.

MEASUREMENTS

Roof area	**37,809 sqft**
Perimeter	**951 lf**
Corners	**13 outside | 9 inside**
Eave height	**≈ 15 ft**

LEVELS

Level 1 | 16,636 sqft — **0.12 in/ft toward N**
flow ends at edge + interior | DEAD FLAT | slope under 1/8 in/ft

Level 2 | 14,106 sqft — **0.03 in/ft toward S**
flow ends at roof edge | DEAD FLAT | slope under 1/8 in/ft

Level 3 | 4,145 sqft — **0.03 in/ft toward NNW**
flow ends at roof edge | DEAD FLAT | slope under 1/8 in/ft

Level 4 | 810 sqft — **0.19 in/ft toward WSW**
surface span 43" | SLOPED ROOF | ponding n/a

TOP PONDING (OF 4)

P1 | 506 sqft in field	**3.0" max | ~452 gal**
P2 | 44 sqft in field	**1.8" max | ~21 gal**
P3 | 47 sqft in field	**1.0" max | ~19 gal**

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

BUILDING 1

PONDING DEPTH

5678 Easy Street, Example, TN

September 17, 2026

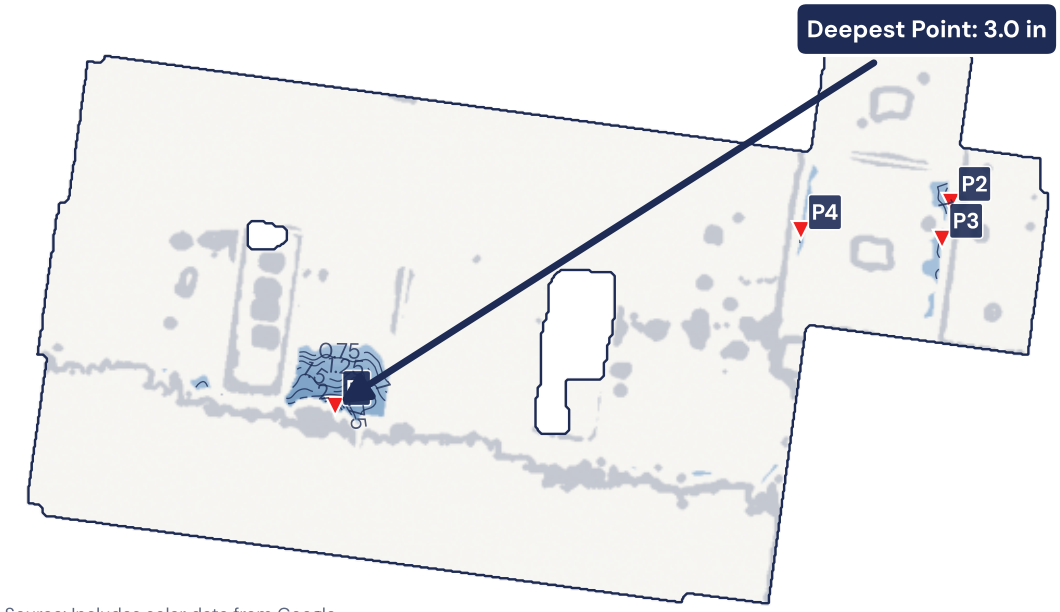

Source: Includes solar data from Google

standing water depth, inches

0.50 1.75 3.00 4.25 5.50 6.75

N

HOW THIS MAP IS MADE

Results are equivalent to the roof after a heavy rain.

▼ marks the deepest point of each counted zone.

MEASUREMENTS

Roof area	**37,809 sqft**
Perimeter	**951 lf**
Corners	**13 outside | 9 inside**
Eave height	**≈ 15 ft**

LEVELS

Level 1 | 16,636 sqft — **0.12 in/ft toward N**
flow ends at edge + interior | DEAD FLAT | slope under 1/8 in/ft

Level 2 | 14,106 sqft — **0.03 in/ft toward S**
flow ends at roof edge | DEAD FLAT | slope under 1/8 in/ft

Level 3 | 4,145 sqft — **0.03 in/ft toward NNW**
flow ends at roof edge | DEAD FLAT | slope under 1/8 in/ft

Level 4 | 810 sqft — **0.19 in/ft toward WSW**
surface span 43" | SLOPED ROOF | ponding n/a

TOP PONDING (OF 4)

P1 | 506 sqft in field	**3.0" max | ~452 gal**
P2 | 44 sqft in field	**1.8" max | ~21 gal**
P3 | 47 sqft in field	**1.0" max | ~19 gal**

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

ACTION MAP

COMPLETE ROOF

5678 Easy Street, Example, TN

September 17, 2026

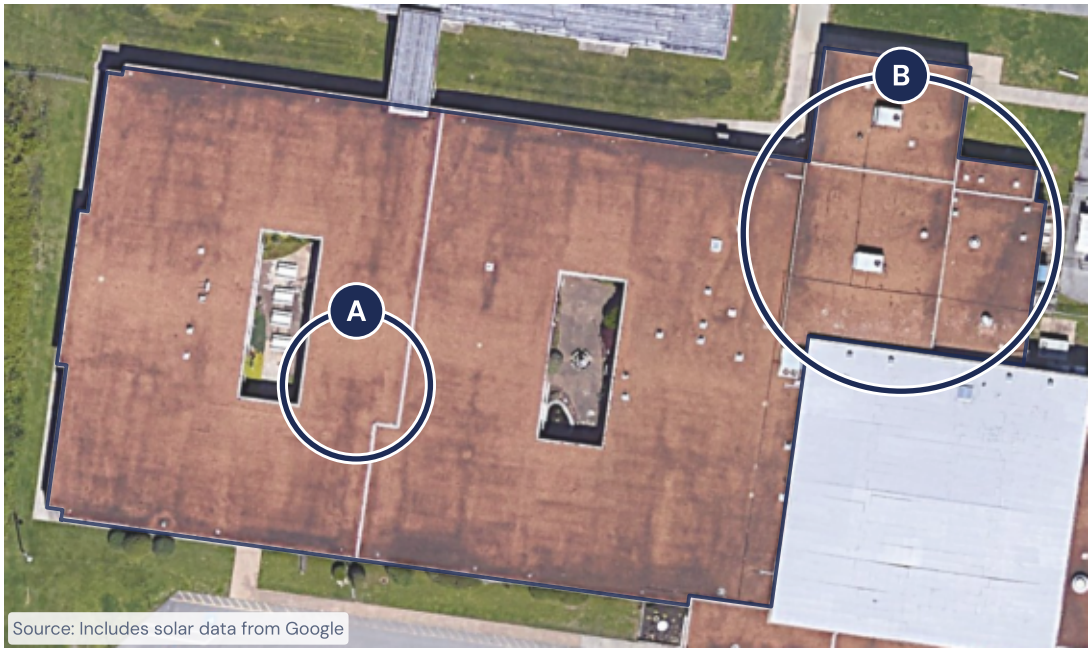

TAKE A LOOK HERE WHEN YOU'RE UP THERE

See if each area just has poor drainage or if it's ponding.

AREAS

Area A	**506 sqft | deepest 3.0″**
Area B	**121 sqft | deepest 1.8″**

N

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry

MOISTURE SUMMARY

MRI RESULTS

5678 Easy Street, Example, TN

September 23, 2026

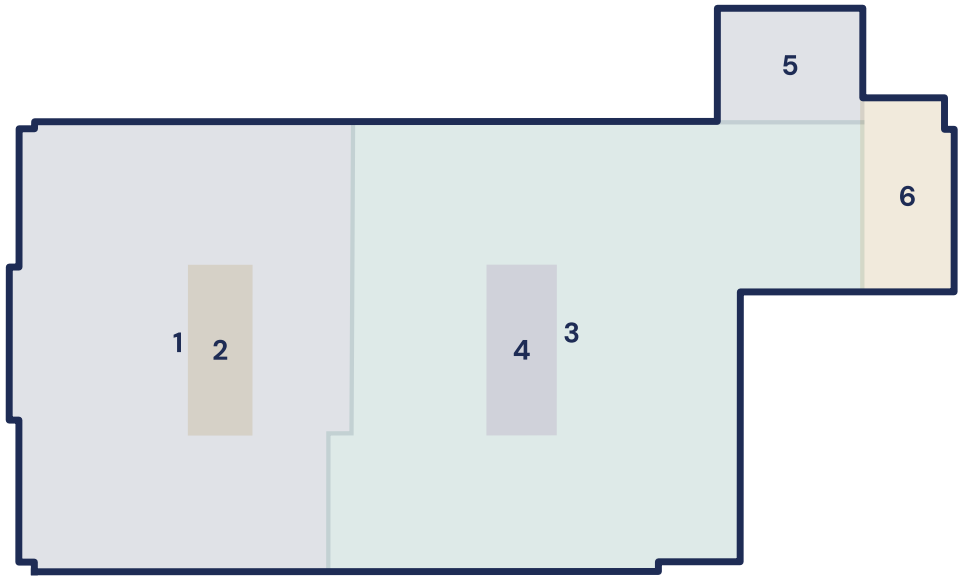

N

MEASUREMENTS

Envelope	**298.1 x 177.8 ft**
Roof area	**37,809 sqft**
Sections	**6**

SURVEY DATA

Floor	**25 REL**
Pin Prick	**31 WME**
Calibration Point	**71 REL**

Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI

MOISTURE SCAN OVERVIEW

COMPLETE ROOF

5678 Easy Street, Example, TN

September 16, 2026



READINGS

Cells read	**396 of 426**
Dry | 0 – 3	**253**
Damp | 4 – 6	**74**
Wet | 7 – 10	**69**
Damp share	**17.4% of roof**
Wet share	**16.2% of roof**

PER SECTION

	Dry	Damp	Wet	% damp	% wet
1	112	29	**15**	**18.6%**	**9.6%**
2	0	0	**0**	**0%**	**0%**
3	104	43	**52**	**21.6%**	**26.1%**
4	0	0	**0**	**0%**	**0%**
5	20	0	**0**	**0%**	**0%**
6	17	2	**2**	**9.5%**	**9.5%**

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

MOISTURE MAP

COMPLETE ROOF

5678 Easy Street, Example, TN

September 16, 2026

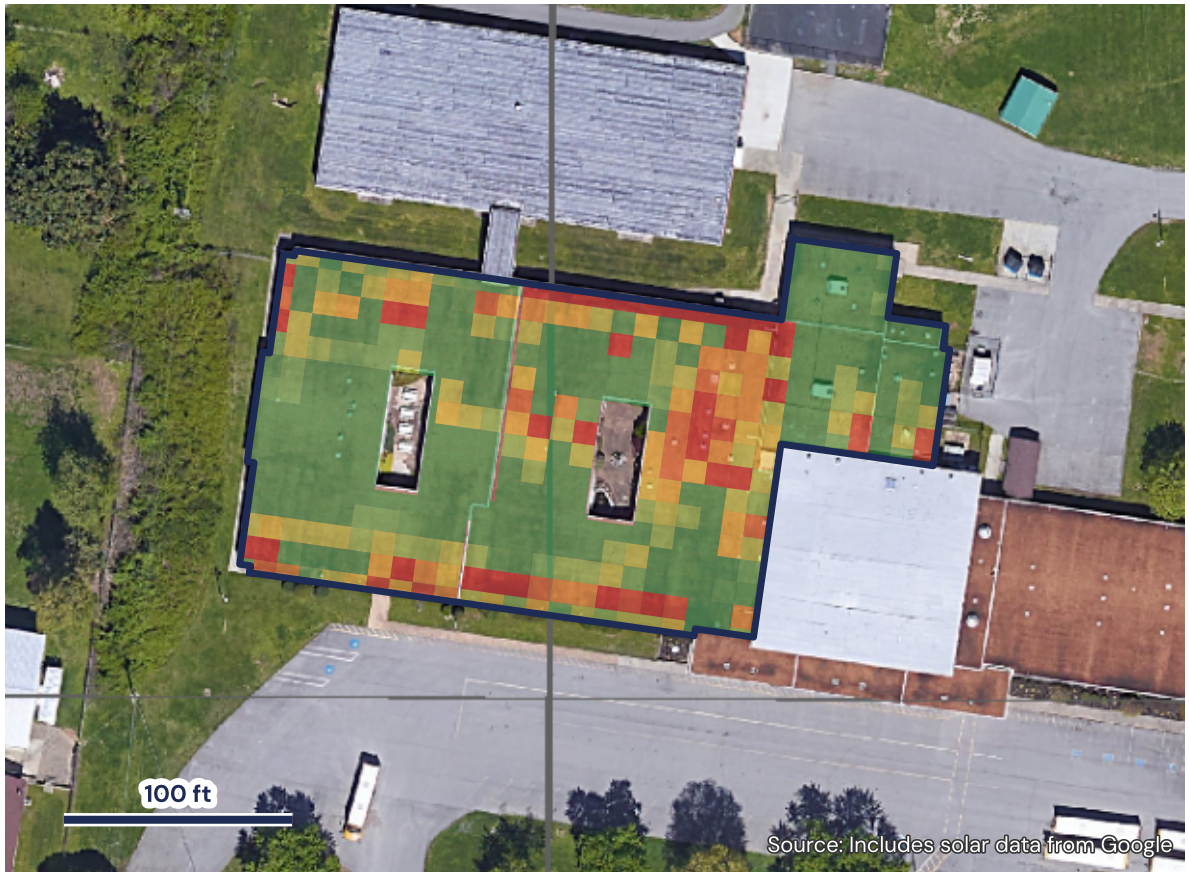

READINGS

Cells read	**396 of 426**
Dry | 0 – 3	**253**
Damp | 4 – 6	**74**
Wet | 7 – 10	**69**
Damp share	**17.4% of roof**
Wet share	**16.2% of roof**

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry

MEASUREMENTS

SECTION 1


5678 Easy Street, Example, TN


September 23, 2026

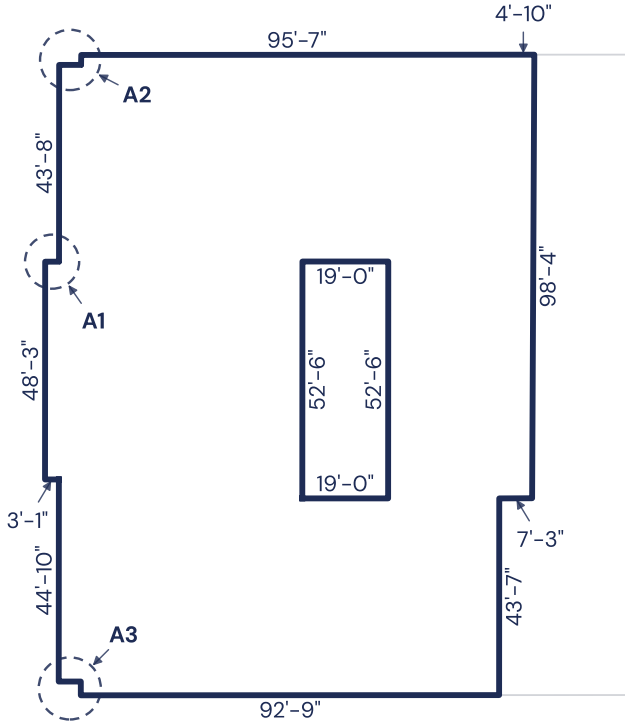



DIMENSIONS

Width x length	**108.5 x 142.1 ft**
Area	**13,725 sqft**
Squares	**137.2**
Perimeter	**643 lf**
Edges drawn	**20**

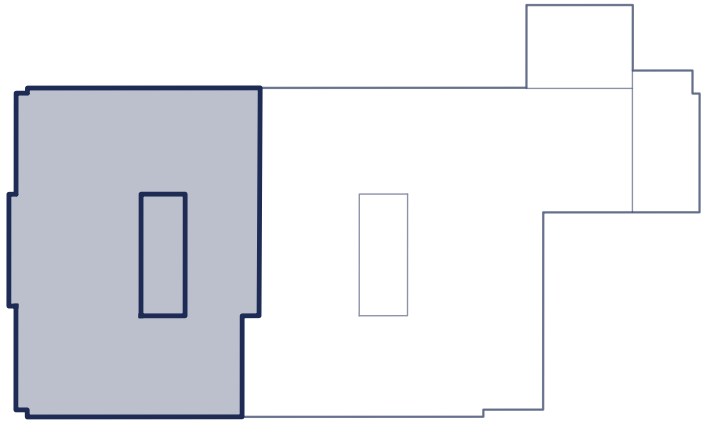







Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI

SECTION 1

MOISTURE FINDINGS

5678 Easy Street, Example, TN

September 16, 2026

	A	B	C	D	E	F	G	H	I	J	K
1	3	4	1	4	3	4	5	3	2	2	2
2	10	0	3	0	4	6	6	0	1	8	6
3	8	0	5	6	0	10	10	0	0	4	2
4	10	4	0	0	0	2	2	0	0	0	0
5	2	4	3	2	2	2	4	0	0	0	0
6	0	2	0	0	0	0		0	4	0	0
7	1	2	0	0	0	0		0	5	4	3
8	0	0	0	0	0	0		0	0	0	0
9	0	0	0	0	0	0		0	0	0	0
10	0	0	0	0	0	0		0	0	0	0
11	0	0	0	0	0	0	0	0	0	0	0
12	0	0	0	0	0	2	2	1	0	0	
13	4	5	4	4	4	3	4	3	3	4	
14	10	10	1	0	0	0	6	10	7	5	
15	2	8	7	2	4	5	9	6	9	7	

N

READINGS

Cells read	156 of 156
Dry | 0 - 3	112
Damp | 4 - 6	29
Wet | 7 - 10	15
Damp share	18.6% of roof
Wet share	9.6% of roof

SURVEY DATA

Floor	25 REL
Pin Prick	31 WME
Calibration Point	71 REL



Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 1

SLOPE DETAIL

5678 Easy Street, Example, TN

September 16, 2026

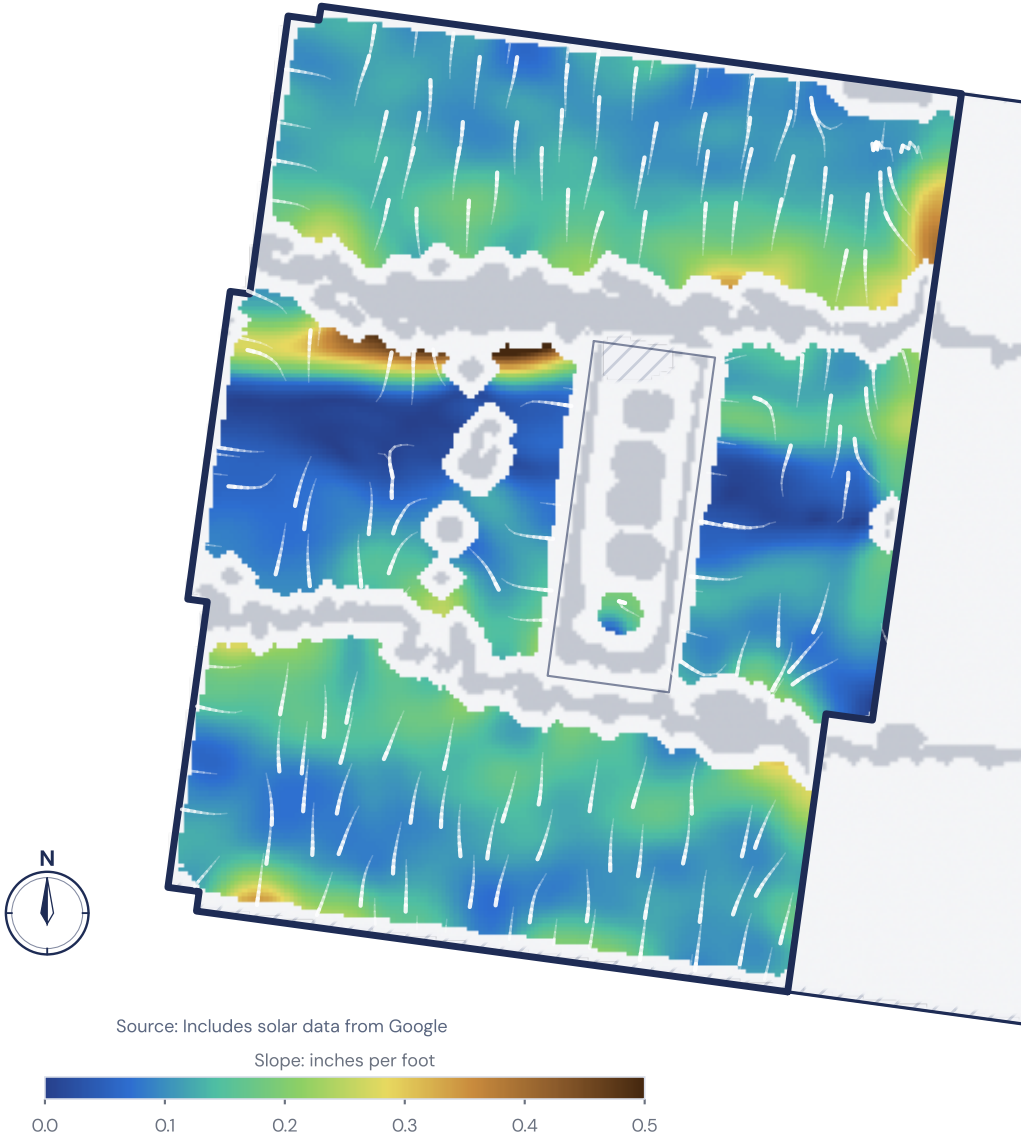


Source: Includes solar data from Google

Slope: inches per foot

0.0 0.1 0.2 0.3 0.4 0.5

SLOPE

Measured slope	**0.12 in/ft WNW**
Flattest tenth	**0.06 in/ft**
Steepest tenth	**0.18 in/ft**

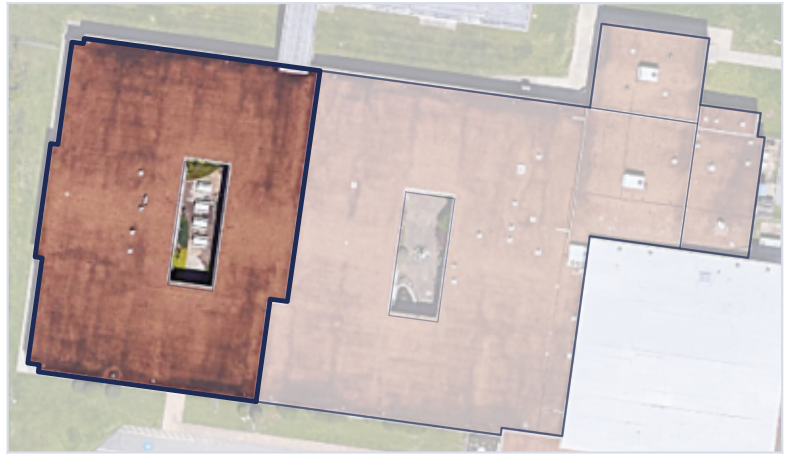

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry

MEASUREMENTS

SECTION 2


5678 Easy Street, Example, TN

September 23, 2026

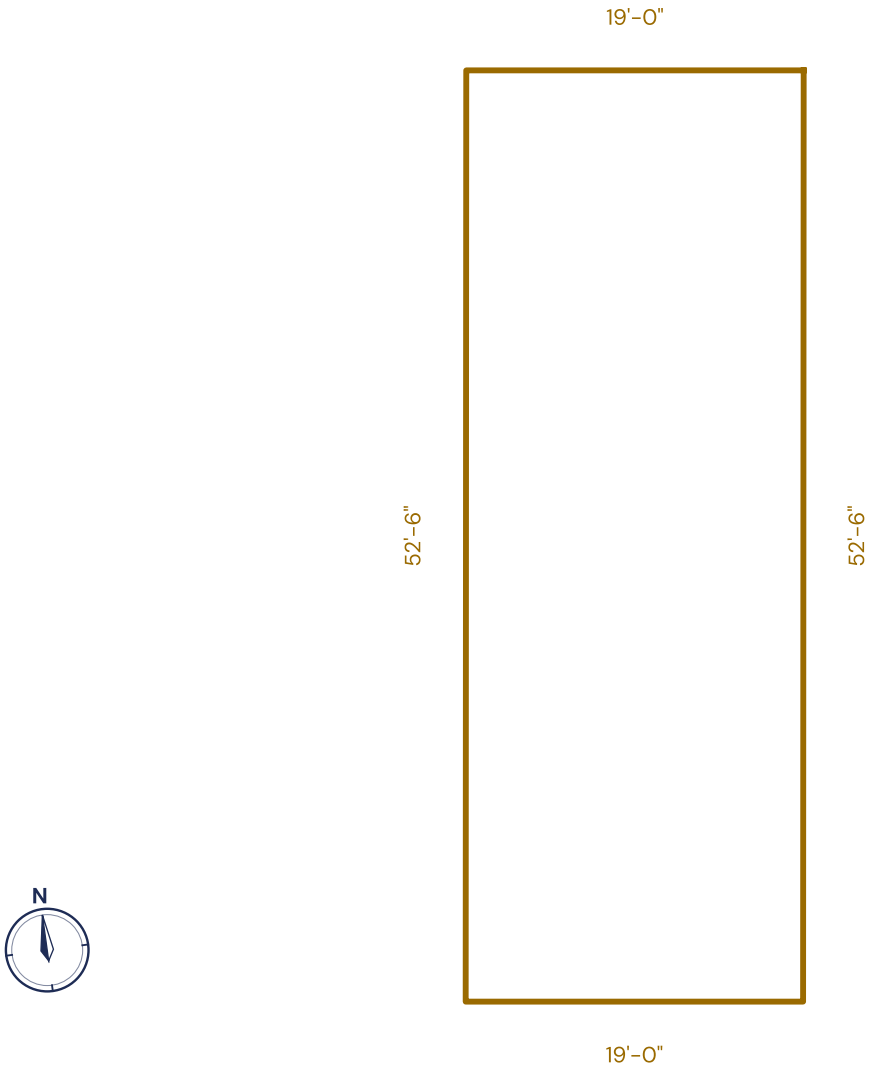

DIMENSIONS

Width x length	**19.1 x 52.5 ft**
Area	**1,000 sqft**
Squares	**10.0**
Perimeter	**143 lf**
Edges drawn	**4**

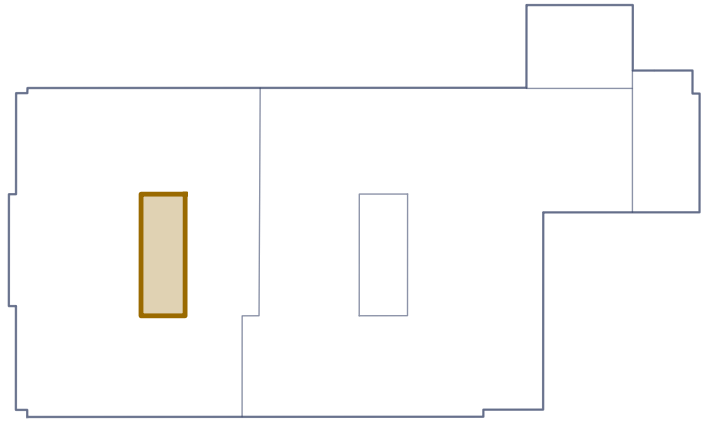

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 2

MOISTURE FINDINGS

5678 Easy Street, Example, TN

September 16, 2026

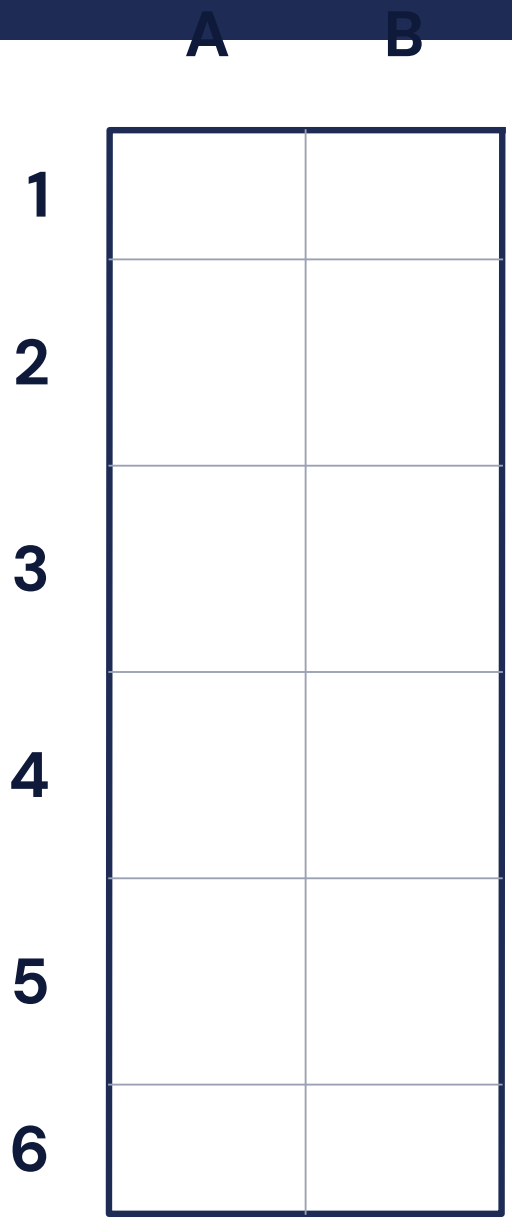




READINGS

Cells read	**0 of 12**
Dry | 0 - 3	**0**
Damp | 4 - 6	**0**
Wet | 7 - 10	**0**
Damp share	**0% of roof**
Wet share	**0% of roof**

SURVEY DATA

Floor	**25 REL**
Pin Prick	**31 WME**
Calibration Point	**71 REL**

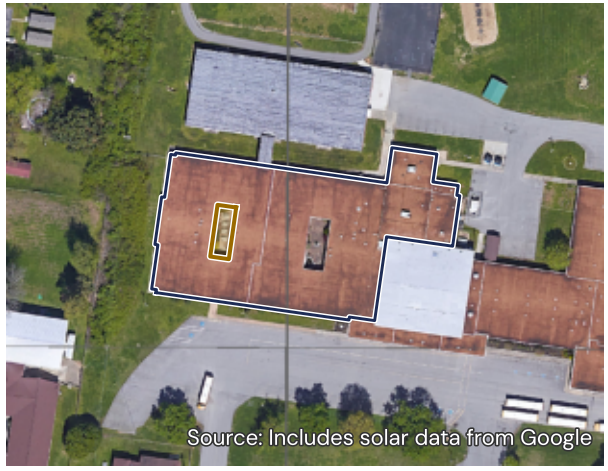

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 2

SLOPE DETAIL


5678 Easy Street, Example, TN

September 16, 2026

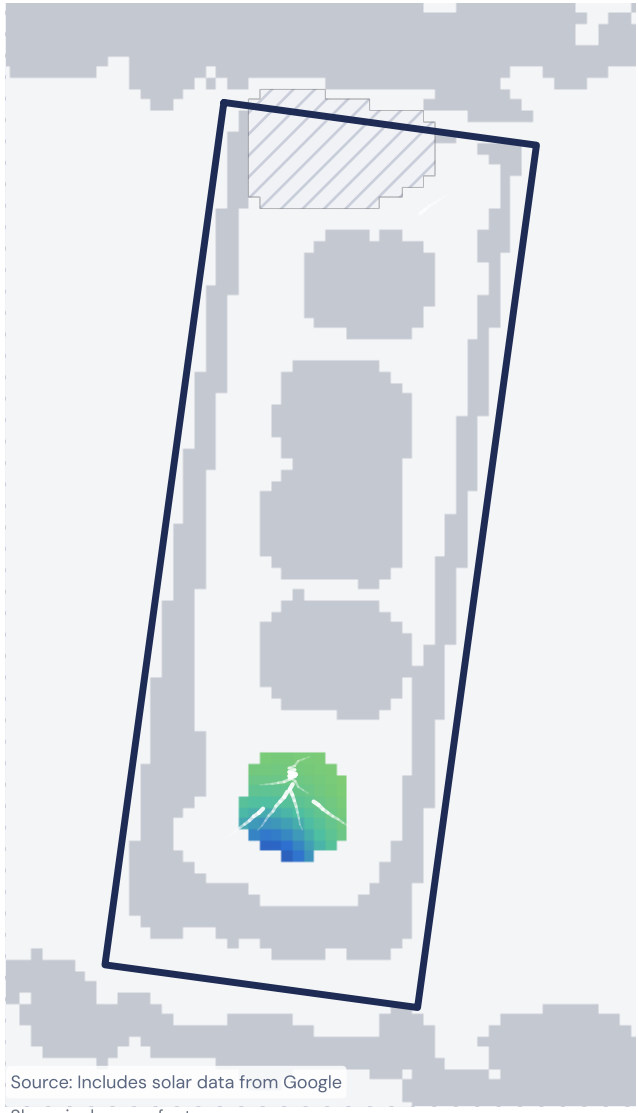

SLOPE

Measured slope	**0.16 in/ft SSW**
Flattest tenth	**0.09 in/ft**
Steepest tenth	**0.19 in/ft**

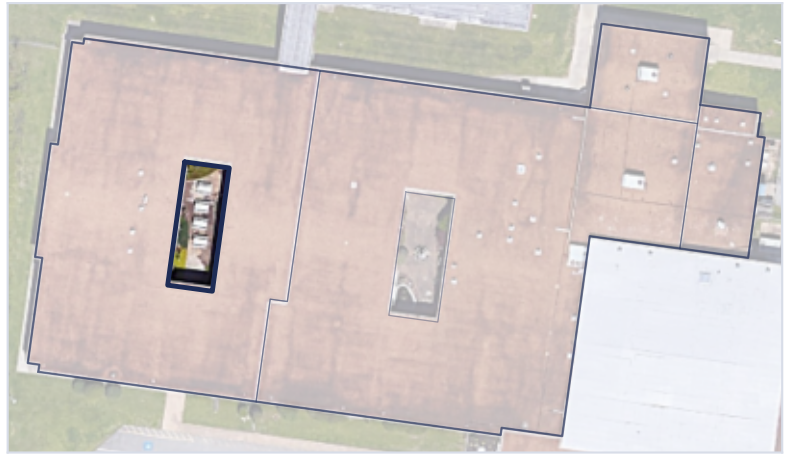

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry


MEASUREMENTS

SECTION 3

5678 Easy Street, Example, TN


September 23, 2026

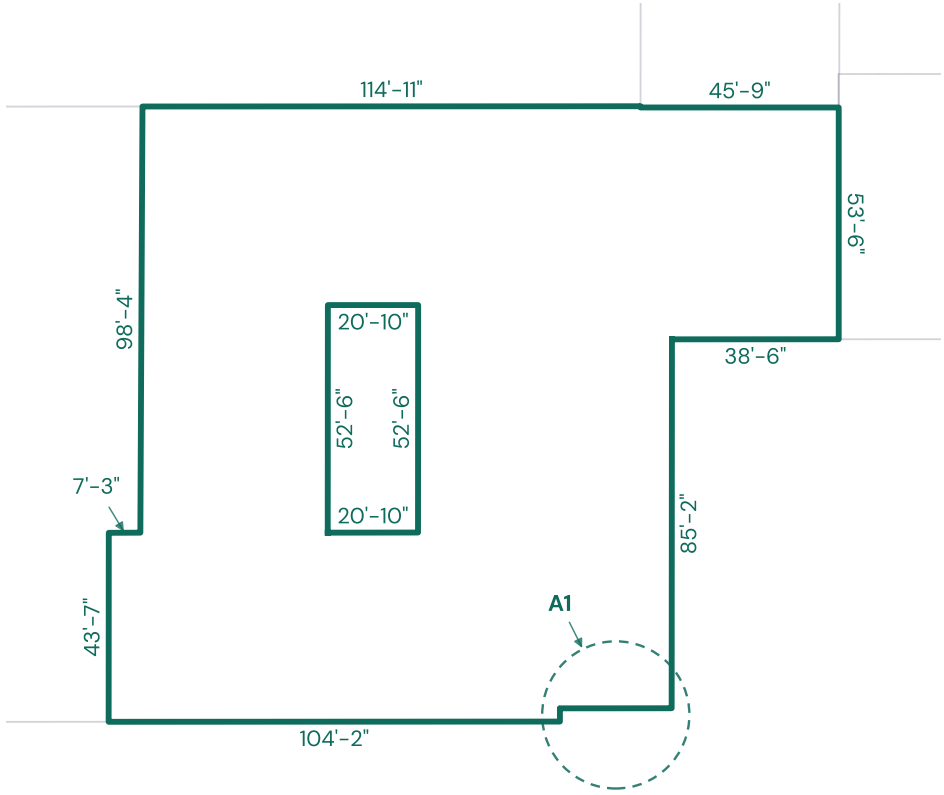



DIMENSIONS

Width x length	**168.5 x 142.1 ft**
Area	**18,595 sqft**
Squares	**185.9**
Perimeter	**767 lf**
Edges drawn	**16**

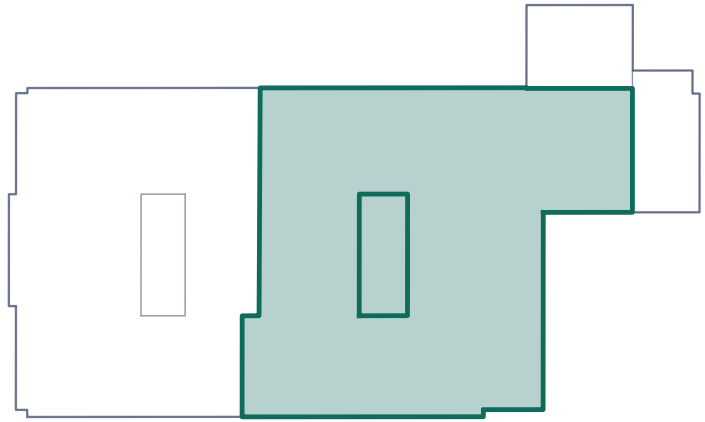

Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI

SECTION 3

MOISTURE FINDINGS

5678 Easy Street, Example, TN

September 16, 2026

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
1		10	10	10	10	10	10	10	10	10	10	10	10	0	0	0	0
2		7	6	6	4	1	5	0	5	1	10	6	10	0	0	0	0
3		4	0	0	0	10	0	3	0	7	7	7	4	0	0	3	0
4		1	0	0	0	0	0	3	4	8	5	7	10	0	0	3	4
5		5	0	0	0	0	0	2	6	10	7	7	4	0	0	4	9
6		8	0	7	2			0	8	10	9	5	5	0	0	2	9
7		6	10	4	10			6	8	10	7	4	6				
8		3	5	0	4			6	8	6	10	10	4				
9		0	3	0	0			5	6	0	0	4	3				
10		0	0	0	0			3	4	3	0	6	8				
11	0	0	0	0	0	0	0	0	3	0	0	6	4				
12	0	0	0	0	0	0	3	4	0	0	0	0	2				
13	3	1	0	2	3	3	4	2	0	0	0	1	1				
14	10	10	10	8	7	7	10	9	10	9	0	0	7				
15	4	5	3	6	2	4	3	4	4	5	0	0	3				


N

READINGS

Cells read	199 of 199
Dry | 0 - 3	104
Damp | 4 - 6	43
Wet | 7 - 10	52
Damp share	21.6% of roof
Wet share	26.1% of roof

SURVEY DATA

Floor	25 REL
Pin Prick	31 WME
Calibration Point	71 REL

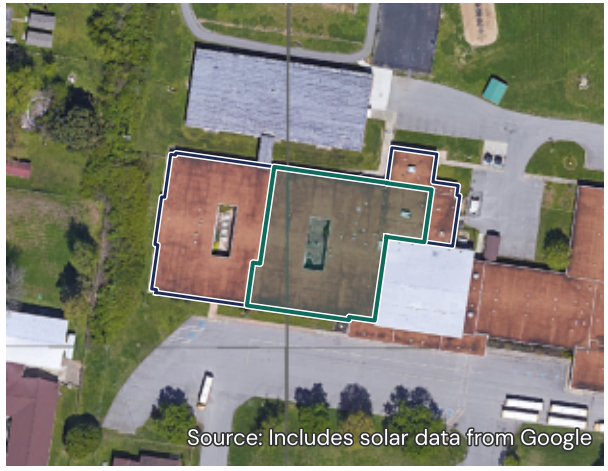

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 3

SLOPE DETAIL

5678 Easy Street, Example, TN

September 16, 2026

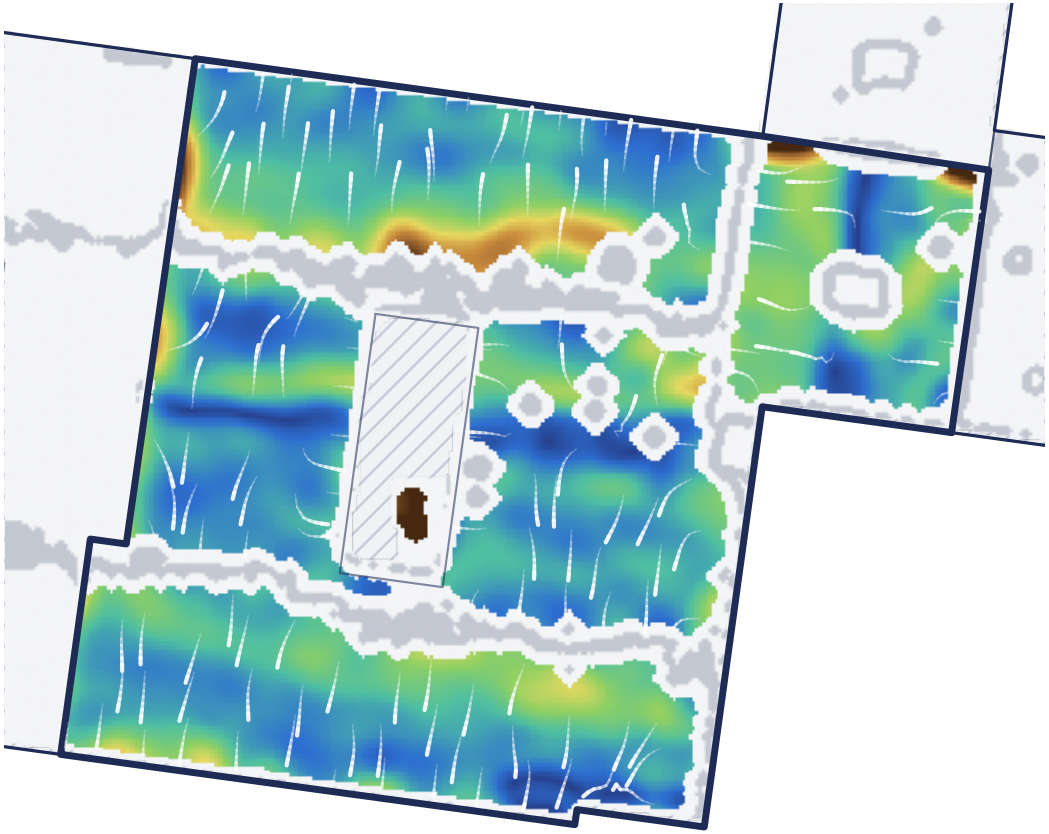

Source: Includes solar data from Google


N

Slope: inches per foot

0.0 0.1 0.2 0.3 0.4 0.5

SLOPE

Measured slope	**0.13 in/ft SSW**
Flattest tenth	**0.08 in/ft**
Steepest tenth	**0.21 in/ft**

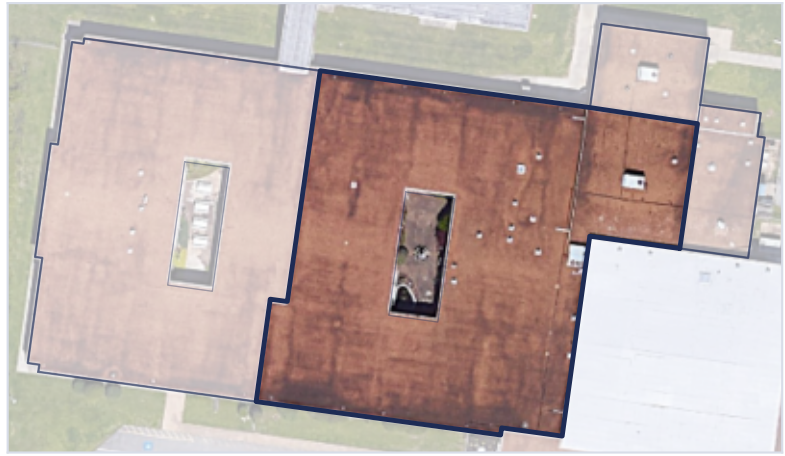

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry

MEASUREMENTS

SECTION 4


5678 Easy Street, Example, TN

September 23, 2026

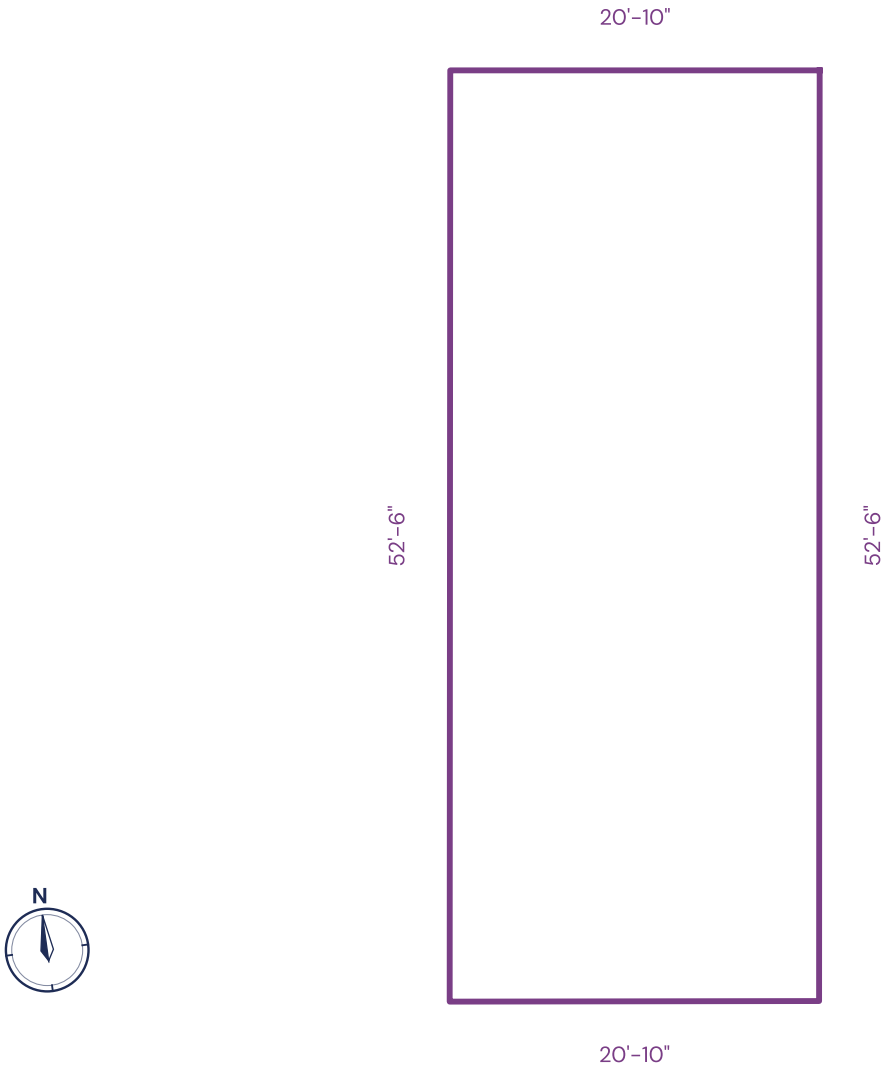

DIMENSIONS

Width x length	**20.9 x 52.5 ft**
Area	**1,094 sqft**
Squares	**10.9**
Perimeter	**147 lf**
Edges drawn	**4**

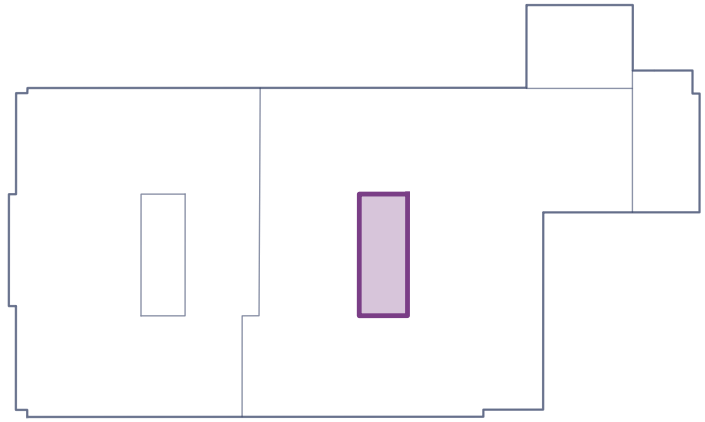

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 4

MOISTURE FINDINGS

5678 Easy Street, Example, TN

September 16, 2026

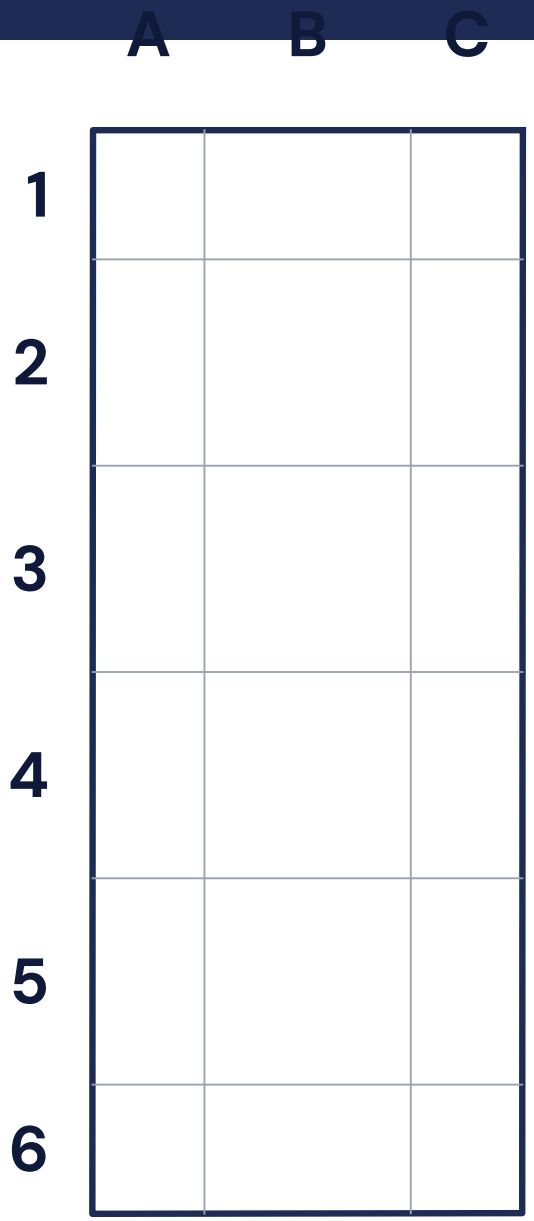



READINGS

Cells read	**0 of 18**
Dry | 0 - 3	**0**
Damp | 4 - 6	**0**
Wet | 7 - 10	**0**
Damp share	**0% of roof**
Wet share	**0% of roof**

SURVEY DATA

Floor	**25 REL**
Pin Prick	**31 WME**
Calibration Point	**71 REL**



Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 4

SLOPE DETAIL


5678 Easy Street, Example, TN

September 16, 2026

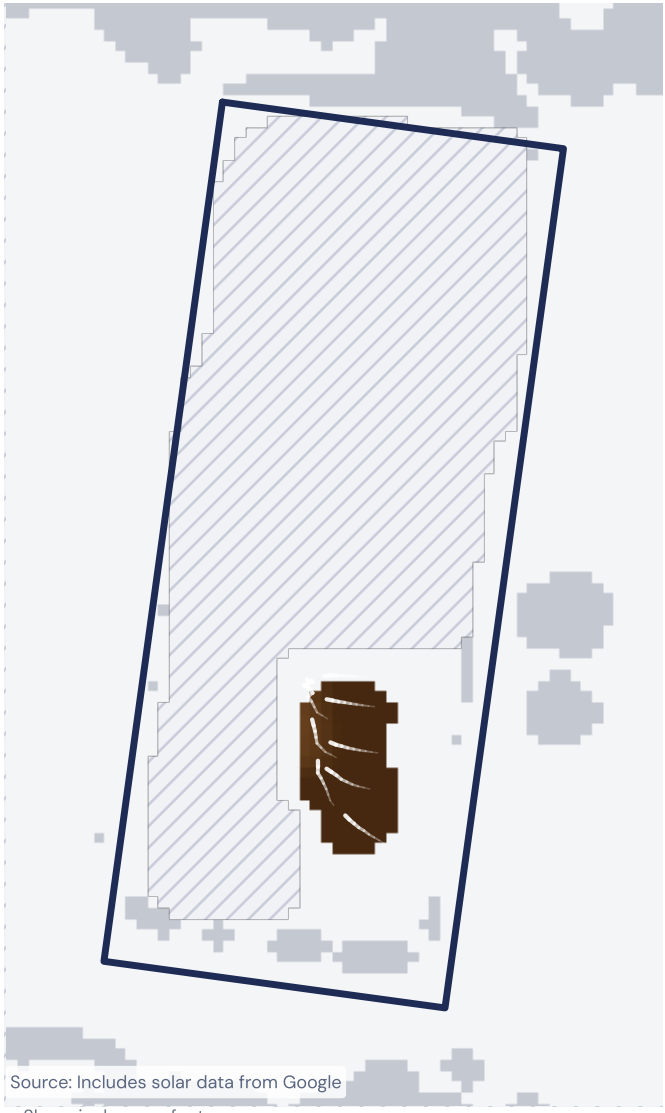

SLOPE

Measured slope	**0.53 in/ft NNW**
Flattest tenth	**0.47 in/ft**
Steepest tenth	**0.60 in/ft**

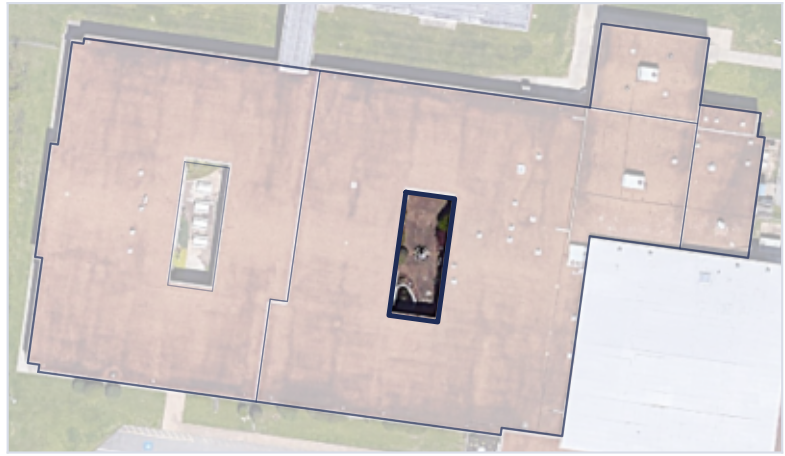

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry

MEASUREMENTS

SECTION 5


5678 Easy Street, Example, TN

September 23, 2026

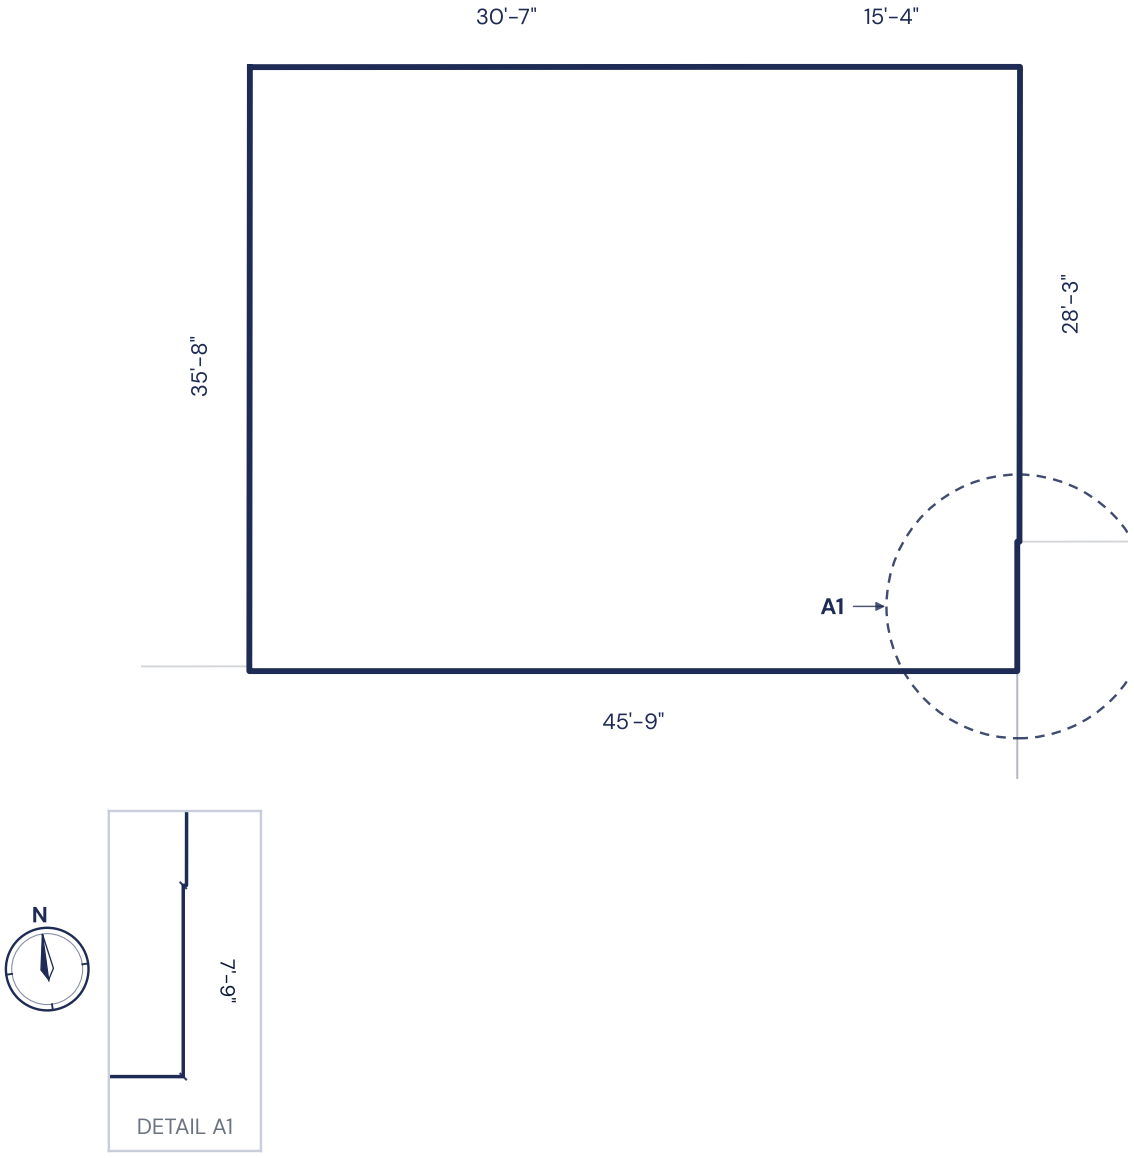

DIMENSIONS

Width x length	**45.9 x 36 ft**
Area	**1,649 sqft**
Squares	**16.5**
Perimeter	**164 lf**
Edges drawn	**6**

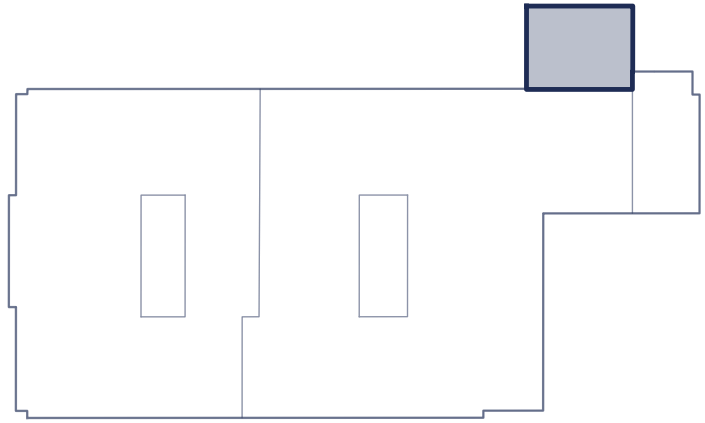

Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI

SECTION 5

MOISTURE FINDINGS

5678 Easy Street, Example, TN

September 16, 2026

	A	B	C	D	E
1	0	0	0	0	2
2	0	0	0	0	0
3	0	0	0	0	2
4	0	0	0	0	0

N

READINGS

Cells read	**20 of 20**
Dry | 0 - 3	**20**
Damp | 4 - 6	**0**
Wet | 7 - 10	**0**
Damp share	**0% of roof**
Wet share	**0% of roof**

SURVEY DATA

Floor	**25 REL**
Pin Prick	**31 WME**
Calibration Point	**71 REL**



Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 5

SLOPE DETAIL

5678 Easy Street, Example, TN

September 16, 2026

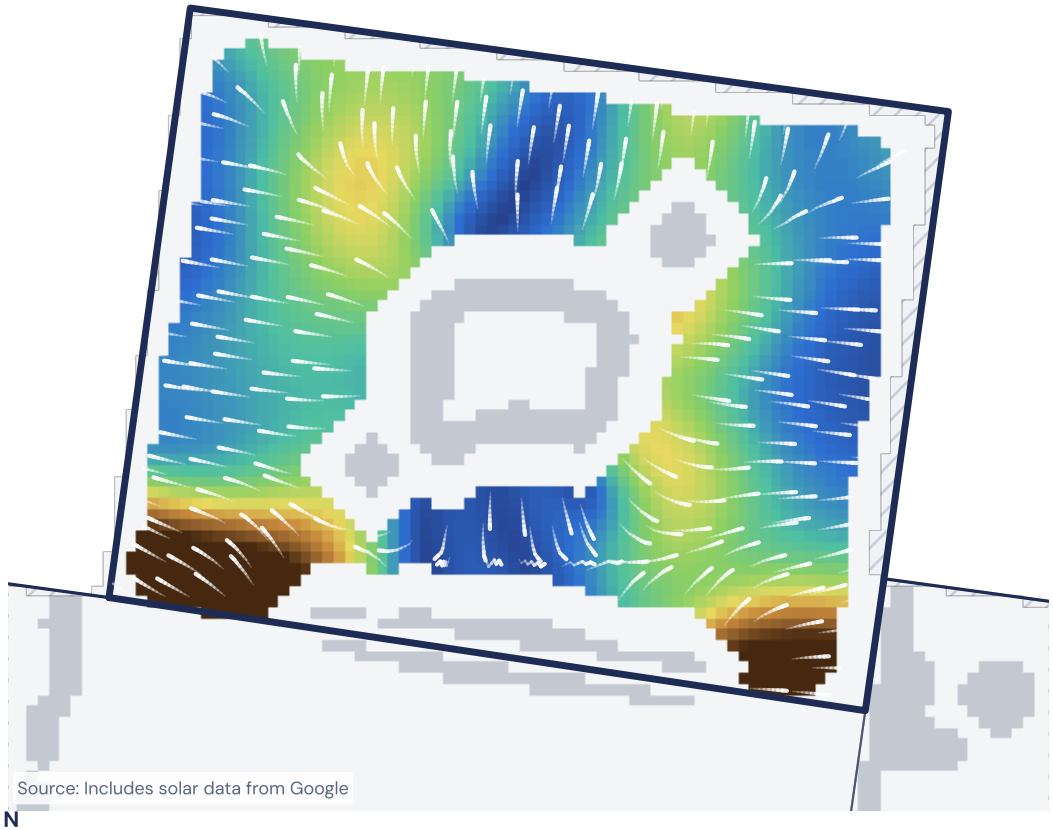


Slope: inches per foot

0.0 0.1 0.2 0.3 0.4 0.5

SLOPE

Measured slope	**0.15 in/ft N**
Flattest tenth	**0.05 in/ft**
Steepest tenth	**0.28 in/ft**

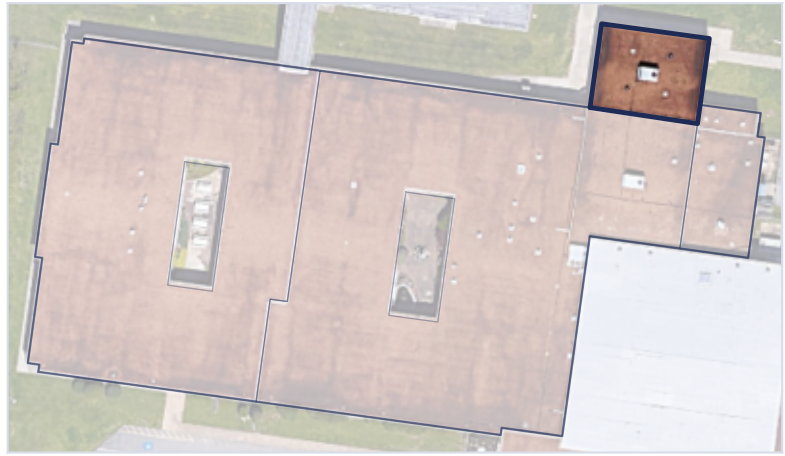

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI | by ReDry

MEASUREMENTS

SECTION 6


5678 Easy Street, Example, TN


September 23, 2026

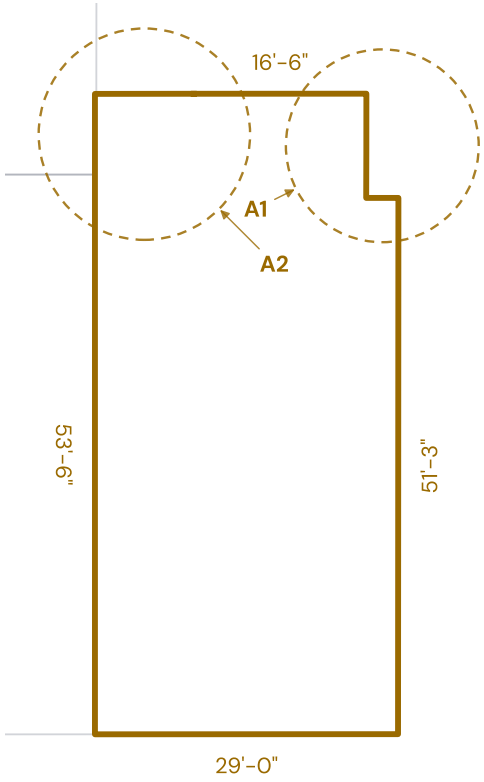


DIMENSIONS

Width x length	**29 x 61.2 ft**
Area	**1,743 sqft**
Squares	**17.4**
Perimeter	**180 lf**
Edges drawn	**9**





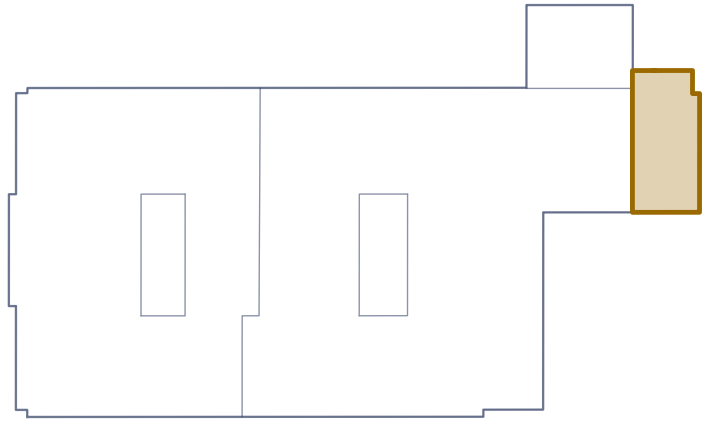

Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI

SECTION 6

MOISTURE FINDINGS

5678 Easy Street, Example, TN

September 16, 2026

	A	B	C
1	0	0	0
2	0	0	0
3	0	0	0
4	0	3	0
5	0	3	4
6	0	4	9
7	0	2	9


N

READINGS

Cells read	**21 of 21**
Dry | 0 - 3	**17**
Damp | 4 - 6	**2**
Wet | 7 - 10	**2**
Damp share	**9.5% of roof**
Wet share	**9.5% of roof**

SURVEY DATA

Floor	**25 REL**
Pin Prick	**31 WME**
Calibration Point	**71 REL**

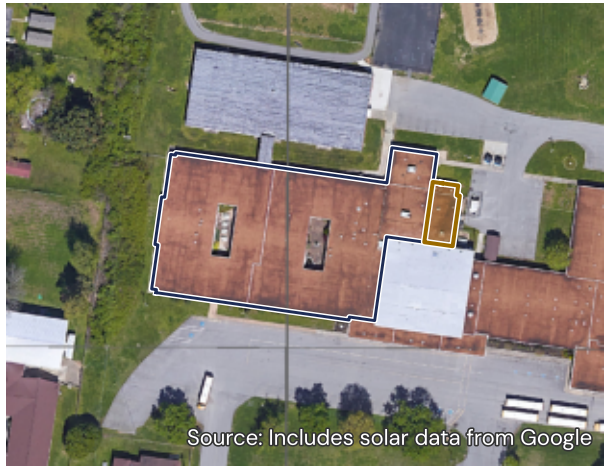

Confidential. Prepared solely for Roof MRI Demo.


ROOF MRI

SECTION 6

SLOPE DETAIL

5678 Easy Street, Example, TN

September 16, 2026

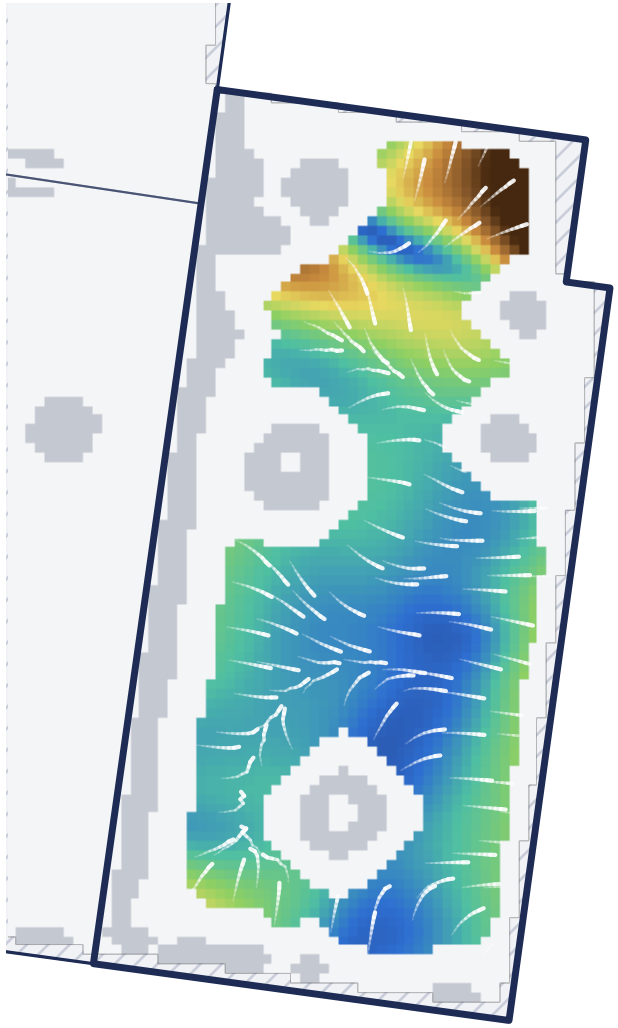

N


Source: Includes solar data from Google

Slope: inches per foot

0.0 0.1 0.2 0.3 0.4 0.5

SLOPE

Measured slope	**0.13 in/ft E**
Flattest tenth	**0.08 in/ft**
Steepest tenth	**0.27 in/ft**

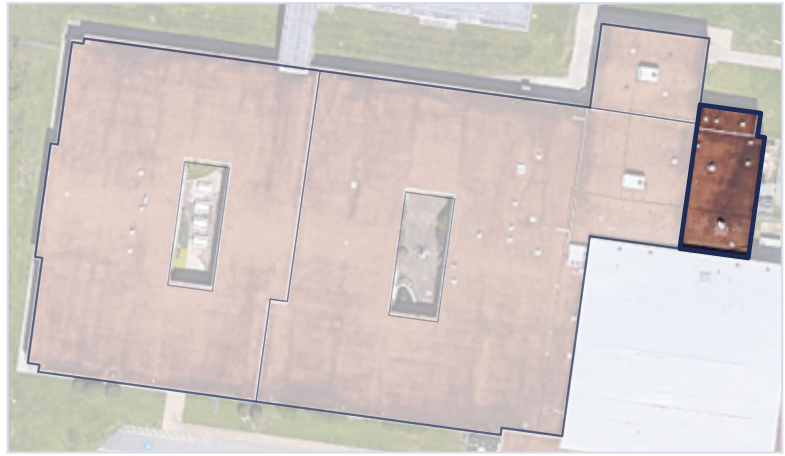

Confidential. Prepared solely for Roof MRI Demo.

Vent Placement Map

ReDry Vents

5678 Easy Street
Example TN



Vent positions measured from the roof walls.

Vents · 3

#	Acro	
1	10	10
2	35	10
3	60	10
4	77	11
5	54	11
6	7	23
7	29	23
8	49	23
9	9	23
10	77	36
11	54	34
12	12	55
13	12	56
14	21	56
15	15	57
16	9	61
17	7	8
18	22	63
19	15	60
20	9	9
21	10	37
22	7	11
23	15	13
24	40	13
25	65	13
26	42	14
27	10	11
28	36	10
29	38	9
30	15	11


ROOF MRI | by ReDry


TAKEOFF


SOLUTIONS


5678 Easy Street, Example, TN

September 23, 2026

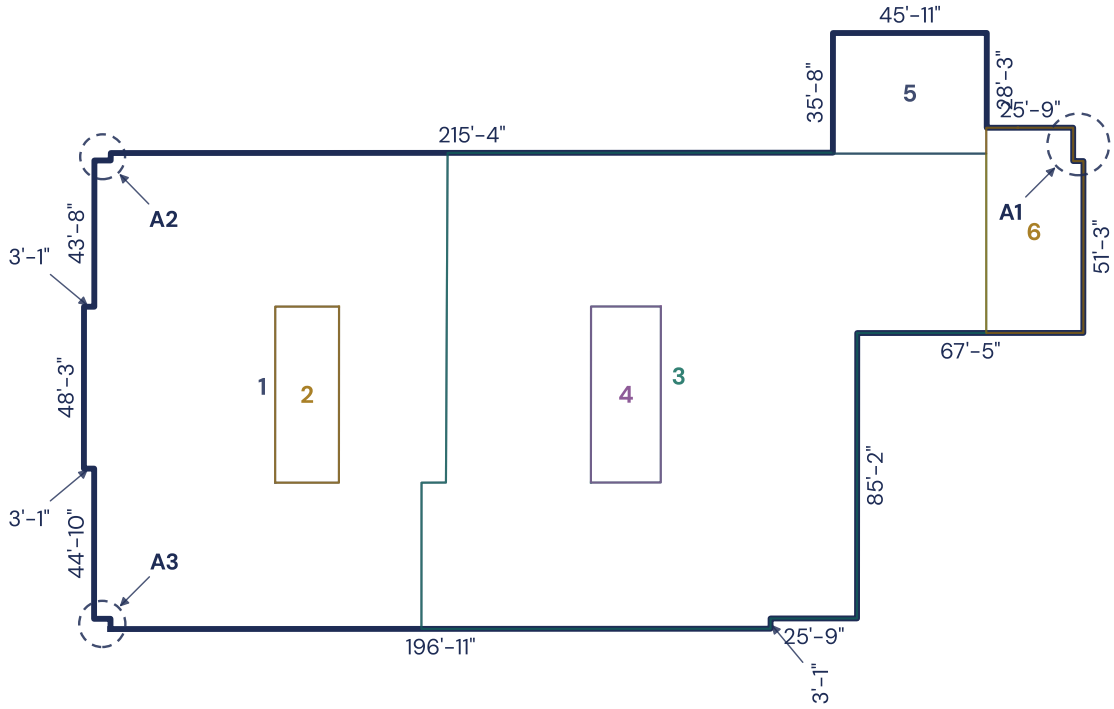







SECTIONS

- Section 1 — **108.5 x 142.1 ft | 13,725 sqft | 11 x 15**
  cols 9.2 | 10 x 9 | 9.2 | rows 6 | 10 x 13 | 6 | ~156 readings
- Section 2 — **19.1 x 52.5 ft | 1,000 sqft | 2 x 6**
  cols 9.5 x 2 | rows 6.3 | 10 x 4 | 6.3 | ~12 readings
- Section 3 — **168.5 x 142.1 ft | 18,595 sqft | 17 x 15**
  cols 9.2 | 10 x 15 | 9.2 | rows 6 | 10 x 13 | 6 | ~199 readings
- Section 4 — **20.9 x 52.5 ft | 1,094 sqft | 3 x 6**
  cols 5.4 | 10 | 5.4 | rows 6.3 | 10 x 4 | 6.3 | ~18 readings
- Section 5 — **45.9 x 36 ft | 1,649 sqft | 5 x 4**
  cols 7.9 | 10 x 3 | 7.9 | rows 8 | 10 x 2 | 8 | ~20 readings
- Section 6 — **29 x 61.2 ft | 1,743 sqft | 3 x 7**
  cols 9.5 | 10 | 9.5 | rows 5.6 | 10 x 5 | 5.6 | ~21 readings

TOTALS

Roof area	**37,809 sqft | 378.1 squares**
Perimeter	**951 lf**
Readings	**~426 cells | 10 x 10 ft**

Confidential. Prepared solely for Roof MRI Demo.

EVALUATION AREA	ASTM CRITERIA	ROOF MRI COMPLIANCE	COMMENTARY
Calibration	Instruments must be calibrated using manufacturer specifications; calibration should be repeatable and validated.	Utilizes a 4-part calibration process including REL/WME readings, pin-prick validation, and analog matching.	■ Exceeds ASTM baseline. Introduces redundant analog confirmation not required by ASTM.
Measurement Grid	Spatial consistency encouraged; methods should allow reproducible location tagging.	10'x10' georeferenced grid overlay tied to satellite/aerial images and compass orientation.	■ Exceeds spatial documentation requirements of ASTM D6232.
Reporting	Should include location, technician, device used, calibration log, and test conditions.	Each Roof MRI Report includes: moisture classification map, technician ID, calibration photos, timestamp, compass orientation.	■ Fully compliant and extended. Offers digital outputs suitable for audit and legal review.
Technician Training	ASTM guidance: documented training in methodology and interpretation of results.	Includes classroom training, rooftop training, AI-enhanced app, digital training modules, step-by-step SOPs, and certification model.	■ Exceeds standard with embedded digital training interface.
Environmental Controls	Must consider environmental effects (e.g., temperature, humidity) that affect measurement reliability.	Reports incorporate calibration before and during use; documentation includes environment notes when relevant.	■ Compliant, and introduces process resilience via in-field recalibration.
Non-Destructive Validation	Use of non-penetrating impedance tools accepted; destructive validation as optional confirmation.	Impedance scanning validated by pin-prick spot tests (semi-destructive) and historical wet/dry insulation calibration samples.	■ ASTM-aligned approach with optional dual-mode validation.

Confidential. Prepared solely for Roof MRI Demo.

SAME EQUIPMENT. DIFFERENT RESULTS.

ROOF MRI VS. TRADITIONAL IMPEDANCE CALIBRATION TECHNIQUES

8 categories
side by side, same meter

CATEGORY	TRADITIONAL IMPEDANCE CALIBRATION DRY-REFERENCE METHOD	ROOF MRI TECHNIQUE WET-REFERENCE DIAGNOSTIC METHOD
Calibration Point	Meter is calibrated to dry material, adjusting needle to hover above zero. This creates a weak electrical connection baseline.	Meter is calibrated to proven wet insulation confirmed by pinprick. Calibration is anchored to the actual conductive target: moisture.
Signal Behavior	Small moisture volumes overpower the circuit; meter spikes to 100. No meaningful gradient.	Produces smooth, readable gradients that reflect moisture density and migration. Shows low, moderate, and high saturation zones.
Discrimination Ability	Cannot distinguish damp vs wet vs saturated. Behaves like a binary "0 or 100" machine.	Discriminates moisture volume with stability. Displays real ranges: (ex: 20 - 30 - 60 - 80 - 100).
Repeatability	Results shift dramatically with operator technique, pressure, angle, and construction differences.	Repeatable results validated through floor identification, wet-zone calibration, and controlled output energy.
Depth Insight	No depth confirmation; readings are guesses without subsurface verification.	Pinpricks measure moisture at multiple depths, revealing top-loaded, mid-loaded, or bottom-loaded insulation saturation.
Photos & Proof	No required calibration photos; no ability to demonstrate correct setup. Disputes rely on opinion.	Requires floor photo, wet-zone photo, pinprick photo, and calibration verification photo. Disputes rely on evidence, not opinion.
Dielectric Noise	Does not calculate or remove dielectric readings that occur within different roofing materials, therefore the effects of dielectric shielding can often occur.	Removes dielectric readings that occur within different roofing materials, so dielectric shielding does not distort the map.
Outcome on the Roof	High rate of false positives and false negatives; difficult to defend under scrutiny.	Stable, defendable moisture maps that define the size, density, and shape of saturated areas with clarity.


Confidential. Prepared solely for Roof MRI Demo.

REDRY APPROVAL SCORE

REDRY

5678 Easy Street, Example, TN

September 23, 2026

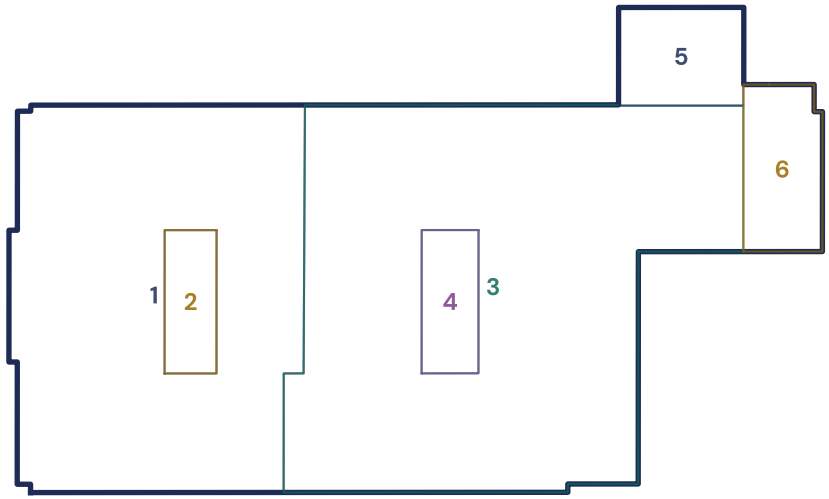

STILL NEEDED

- Drain Placements
- Core Sample
- Desired System
- Decking

TESTS

OVERALL A

Rooftop Temp	107 F	A
Sustained Wind	5.5 mph	B
MRI Scan Results	On record	A

N

Confidential. Prepared solely for Roof MRI Demo.

REDRY

PLANET POSITIVE

PROPERTY WORKUP

5678 Easy Street, Example, TN

September 23, 2026

THREE OPTIONS, ONE ROOF

Tear it all off

Everything to the landfill.

Spot remove and replace

Every new seam is a future leak.

Dry it in place

Keep the membrane. Dry the insulation. Coat and protect.

NO CHEMICALS, NO WASTE

- Solar panels power the vents
- No chemical residues
- Vents are relocated for use in other projects
- Roof insulation stays out of the landfill

Confidential. Prepared solely for Roof MRI Demo.

ROOF MRI | ReDryby

WHAT WE NEED NEXT

PROPERTY WORKUP

5678 Easy Street, Example, TN

September 23, 2026

- [ ] **Drain Placements**
- [x] MRI Scan Results
- [ ] **Core Sample**
- [ ] **Desired System**
- [ ] **Decking**

Order or Get Trained Here

Confidential. Prepared solely for Roof MRI Demo.

LIMITS OF LIABILITY

WE KNOW IT'S BORING. PLEASE READ IT.

1. Nature of This Report

This report is prepared by ReDry LLC ("ReDry") and presents measurements and observations of the subject roof as of the dates stated herein, produced using the methods, imagery, surface models, and field procedures described or referenced in this document. It is provided for general informational purposes only. It is not a certification, guarantee, inspection report, engineering evaluation, code compliance determination, appraisal, or survey of any kind.

2. No Warranty

This report and all information in it are provided "as is" and "as available," without warranty of any kind, express, implied, statutory, or otherwise. ReDry expressly disclaims all implied warranties, including without limitation the implied warranties of merchantability, fitness for a particular purpose, accuracy, completeness, non-infringement, and any warranty arising from course of dealing, usage, or trade practice.

3. Measurements Are Estimates

All areas, lengths, slopes, depths, counts, coordinates, drawings, and time estimates are approximations derived from remote imagery, surface models, drawn markups, and field readings, each of which carries inherent error and may not reflect current conditions. Rounding is applied throughout. No measurement in this report is represented to be exact, and none is a substitute for a field measurement taken for construction, fabrication, purchasing, bidding, or contractual purposes.

4. Not Professional Advice

Nothing in this report constitutes, or should be relied upon as, engineering, architectural, structural, legal, insurance, safety, or other professional advice, and no professional-client relationship of any kind is created by its delivery. This report does not identify, and does not claim to identify, all conditions, deficiencies, moisture, or hazards that may exist in or around the roofing system, whether or not observable by the methods employed.

5. Independent Verification Required

Any person who uses this report for any decision, including without limitation repair, replacement, maintenance, renovation, purchasing, bidding, contracting, financing, or insurance decisions, must independently verify all information through qualified professionals and appropriate testing before acting. Any use of, or reliance upon, this report is at the user's sole risk.

6. Prepared Solely for the Named Recipient

This report is prepared solely for the recipient named on its pages and for no other person or entity. No third party is entitled to use or rely upon this report for any purpose, and ReDry accepts no duty or liability of any kind to any third party. Distribution of this report to any third party does not create any such duty or liability.

7. Limitation of Liability

To the maximum extent permitted by law, the total aggregate liability of ReDry, its owners, officers, employees, contractors, and agents, arising out of or related to this report, under any theory of liability (whether contract, tort, negligence, strict liability, statute, or otherwise), shall not exceed the amount actually paid to ReDry for this report. In no event shall ReDry be liable for any indirect, incidental, special, exemplary, punitive, or consequential damages, or for lost profits, lost revenue, loss of use, diminution in value, or business interruption, even if advised of the possibility of such damages.

8. Release and Indemnification

To the maximum extent permitted by law, the recipient, for itself and anyone claiming through it, releases ReDry from, and agrees to defend, indemnify, and hold ReDry harmless against, any and all claims, demands, losses, damages, costs, and expenses (including reasonable attorneys' fees) arising out of or relating to any use of, reliance on, or distribution of this report.

9. Claims Period

Any claim arising out of or relating to this report must be brought within one (1) year after the date of this report, and any claim not brought within that period is permanently barred, to the maximum extent permitted by law.

10. Governing Law and Severability

This page is governed by the laws of the State of Tennessee, without regard to conflict-of-laws principles. If any provision of this page is held unenforceable, it shall be enforced to the maximum extent permissible and the remaining provisions shall remain in full force and effect. This page states the entire understanding regarding limitations of liability for this report and supersedes any conflicting statement.

11. Acceptance of Terms

Retention, use, or distribution of this report, in whole or in part, constitutes acceptance of every condition and limitation on this page.

This Roof MRI™ Report has been generated using ReDry's proprietary, patent-pending moisture detection methodology. 'Roof MRI' is a trademark of ReDry LLC.

Confidential. Prepared solely for Roof MRI Demo.

Scan Before You Bid

877.733.7973

info@re-dry.com

Confidential. Prepared solely for Roof MRI Demo.